

BLANCO CHOICE Icona-C

Assembly instructions • 组装说明

blanco.com



eng	ASSEMBLY INSTRUCTIONS	4
zhx	组装说明	12

Contents



1. Safety	4-6
1.1 General information	4
1.2 Intended use	5
1.3 Restrictions on the user group	5
1.4 Safe installation	5
1.5 Safe use	6
1.6 Plumbing Code of Australia (PCA)	6
2. Avoiding property damage	6
3. Environmental protection	7
4. Assembling and connecting	7-10
4.1 Scope of delivery	7
4.2 Criteria for the installation location	7
4.3 Fitting the mixer tap	7-9
4.4 Preparing the mixer tap for first use	10
5. Shutting down	11
6. Disposing of the mixer tap	11
7. Customer service	11



1. Safety

Please observe the following instructions.

1.1 General information

These assembly instructions are part 1 of a total of 4 manuals. You will find the manual number on the cover page of the document.



- ▶ Please read these instructions and other accompanying instructions carefully before assembling and using the product to ensure correct assembly and safe use of the product.
- ▶ Ensure that you follow the instructions and the work steps in the specified order.
- ▶ Observe the safety instructions and the installation requirements.
- ▶ Pay attention to the indicator elements on the components: the LEDs on the mixer tap and the display on the base cabinet unit.
- ▶ Keep the manuals and product information in a safe place ready to use at a later date or pass on to the subsequent owner.
- ▶ Do not connect the mixer tap if it has been damaged during transport.

1.2 Intended use

This mixer tap is suitable for use in private homes. It is designed for use in Australia and China, incl. Hongkong.

Use this mixer tap only:

- in conjunction with a BLANCO CHOICE base cabinet unit.
- in closed rooms in a home environment, usually the kitchen.

Any operation beyond the intended usage or any other use is considered misuse. BLANCO accepts no liability for any damage caused by misuse.

1.3 Restrictions on the user group

Children aged 8 or over and people with reduced physical, sensory or mental capabilities or lacking in experience and knowledge may only use the mixer tap under supervision or if they undergo a suitable briefing on safe usage and they are aware of the associated risks and hazards. Children must not play with the mixer tap. Children must not carry out cleaning and user maintenance without supervision.

1.4 Safe installation

NOTICE!

Maintain cleanliness. Careless handling can cause problems with water hygiene.

- Keep water-conducting parts such as seals, threads and hose connections clean. Only touch after cleaning your hands thoroughly.
- Do not touch any surfaces that come into contact with drinking-water after installation.

1.5 Safe use

WARNING risk of suffocation!

Children can pull packaging material over their heads or wrap themselves in it and suffocate!

- ▶ Keep packaging material away from children.
- ▶ Do not allow children to play with packaging material.

Children can inhale or swallow small parts and choke as a result!

- ▶ Keep small parts away from children.
- ▶ Do not allow children to play with packaging material.

1.6 Plumbing Code of Australia (PCA)

WARNING — FOR CONTINUED SAFETY OF THIS APPLIANCE IT MUST BE INSTALLED, OPERATED AND MAINTAINED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.

WARNING — FOR CONTINUED SAFETY OF THIS APPLIANCE IT MUST BE INSTALLED IN ACCORDANCE WITH THE PLUMBING CODE OF AUSTRALIA (PCA).

WARNING — THIS APPLIANCE MAY DELIVER WATER AT HIGH TEMPERATURE. REFER TO THE PLUMBING CODE OF AUSTRALIA (PCA), LOCAL REQUIREMENTS AND INSTALLATION INSTRUCTIONS TO DETERMINE IF ADDITIONAL DELIVERY TEMPERATURE CONTROL IS REQUIRED.

2. Avoiding property damage

Damage, incorrect installation and improper repairs can cause leaks and considerable property damage.

- ▶ Only trained specialists may install and connect the mixer tap. BLANCO assumes no liability for improper or non-professional installation.
- ▶ Cables and hoses must be routed in such a way that they cannot be damaged. If you use a waste system, you must pay special attention and ensure that cables and hoses cannot become caught or damaged.
- ▶ Never put a damaged mixer tap into operation.
- ▶ Only trained specialists may repair the mixer tap.
- ▶ Have damaged parts replaced by a professional.
- ▶ Only original spare parts may be used to repair the mixer tap.

3. Environmental protection

The packaging materials are environmentally friendly and recyclable.


- Sort and dispose of each individual part by material type



4. Assembling and connecting

4.1 Scope of delivery

After unpacking the delivery, check all parts for transport damage and ensure they are complete. The delivery consists of the parts shown here and two manuals. If you have any complaints, please contact your dealer or our customer service → see rear page.

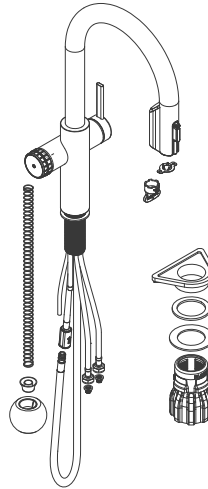

4.2 Criteria for the installation location

Water connection requirements

- Constant drinking water quality
- Constant flow pressure

Hot water corner valve

- Maximum temperature 70 °C (158 °F)
- Maximum pressure 10 bar (145 psi)

Cold water corner valve

- Temperature 5 - 30 °C (40 - 86 °F)
- Pressure 1 - 10 bar (14.5 - 145 psi)


Tap hole requirements

The sink or worktop must have a tap hole 35 mm (1 3/8") in diameter; maximum thickness of the worktop: 50 mm (1 15/16").


4.3 Fitting the mixer tap



See video with step-by-step instructions for the entire installation process at:
blanco.com/install-choice

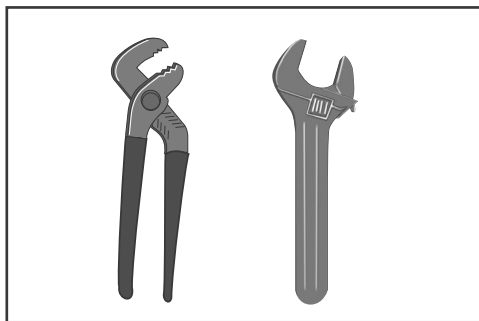
Required tools:


- Pliers
- Adjustable wrench

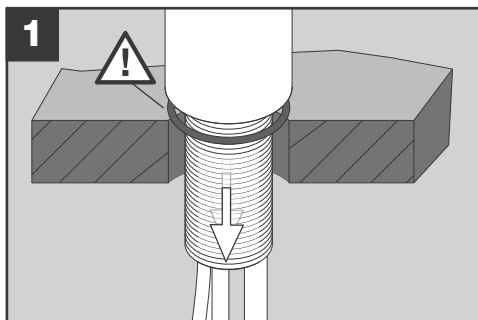

Insert the mixer tap in tap hole.


NOTICE!

Ensure that the rubber seal is in the correct position!

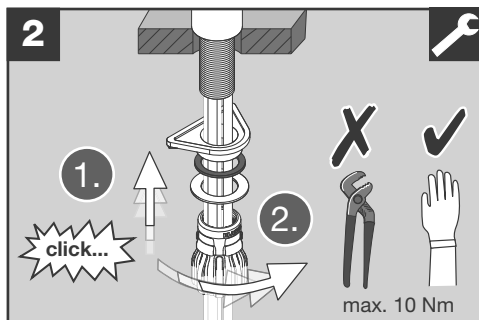

Fasten the mixer tap with the assembly set.

First push the mounting nut upwards and then tighten it by hand.

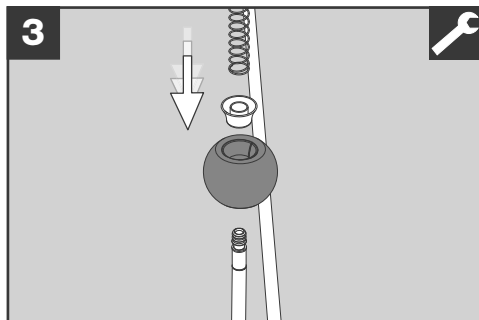


Slide three components onto the shower hose in the correct order:


- first the ball weight,
- then the stopper,
- finally the spring.

NOTICE!


The spray hose must be fitted in the base cabinet in such a way that the weight can glide freely along the hose and does not get caught anywhere!

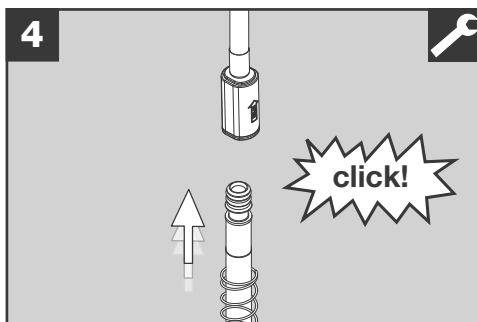

Insert the spray hose into the connecting piece.

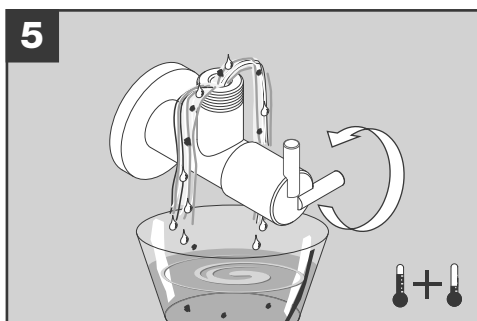

Purge both corner valves until clean water comes out.

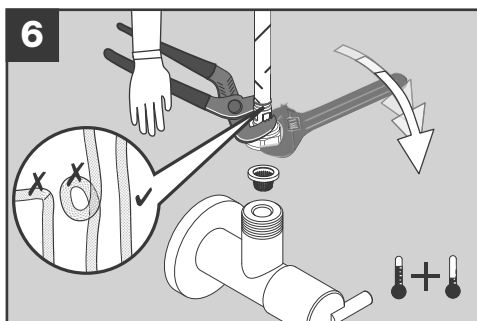


NOTICE!

Hoses must not be twisted or kinked!

- Install the hoses so that they are straight and secure them against twisting when tightening the nut. Ensure that a sieve seal is inserted.

- Attach the red flexible hose from the mixer tap to the hot water corner valve (left).
- Attach the blue flexible hose to the cold water corner valve (right).

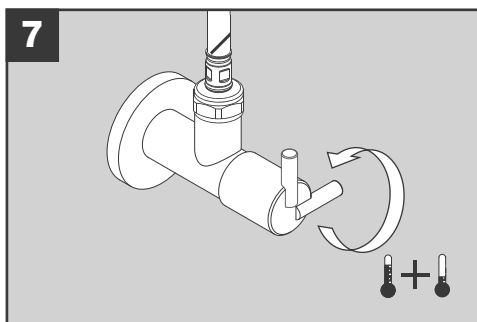


Fully open both corner valves.


NOTICE!

Check all connections for leaks!


4.4 Preparing the mixer tap for first use

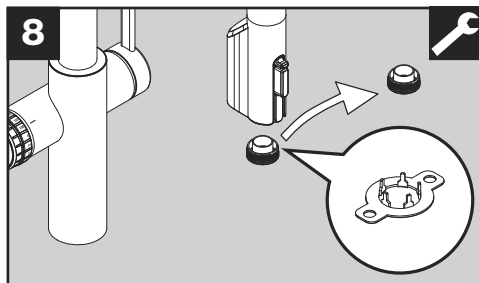

Remove the flow regulator from the spray head (spanner is supplied with the mixer tap).

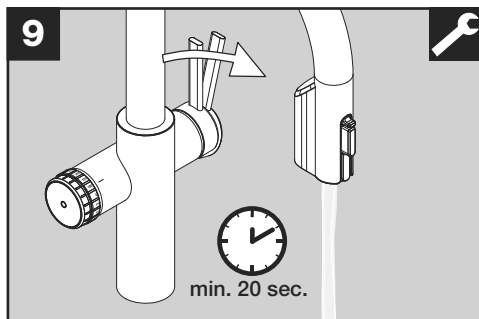

Purge mixer tap and hoses thoroughly with water (hot and cold water; at least 20 seconds).

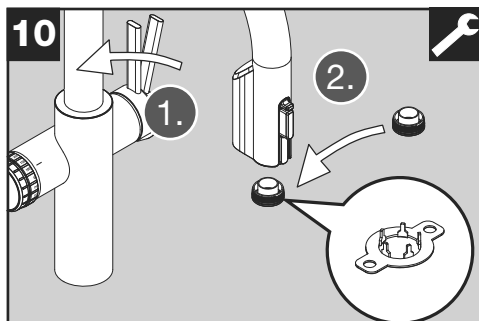

Close the lever and re-assemble the flow regulator.



Continue installing the base cabinet unit:
→ See manual 2

5. Shutting down

- ▶ Close both corner valves.
- ▶ Deactivate the base cabinet unit or disconnect the mains plug.



CAUTION

Risk of burns!

The pipe connectors at the base cabinet unit rear and below the mixer tap as well as the red connection hose to the mixer tap can be very hot. Touching hot surfaces can cause burns!

- ▶ Do not touch these surfaces with your bare hands.
- ▶ Let the system cool down after pulling out the mains plug.

NOTICE!

When disconnecting water-conveying hoses/hoses, small amounts of water may leak out!

- ▶ Unscrew hoses to the corner valves.
- ▶ Detach the blue and red connecting hoses either from the mixer tap or at the base cabinet unit. Press the outer ring on the connecting piece to do so.
- ▶ Detach the signal cable from the base cabinet unit.
- ▶ Undo the spray hose connection and remove the spray hose weight.
- ▶ Undo installation nut and remove mixer tap.

6. Disposing of the mixer tap

You are legally obliged to avoid generating waste and protect your health and the environment:

- ▶ Return the product to a collection point. Do NOT dispose of the product in general household waste.



7. Customer service

If you have any questions or complaints, please contact your dealer or our customer service → see rear.

For more information and spare parts, please visit the
BLANCO online shop:
blanco.com/shop-choice



目录



1. 安全	12-13
1.1 常规提示	12
1.2 指定的用途	13
1.3 用户群体的限制	13
1.4 安全地安装	13
1.5 安全地使用	13
2. 避免财产损失	14
3. 环境保护	14
4. 安装和连接	14-18
4.1 供货范围	14
4.2 安装地点的标准	14
4.3 安装龙头	15-17
4.4 准备首次使用龙头	18
5. 停止使用	19
6. 丢弃龙头	19
7. 客户服务	19



1. 安全

请遵守下列安全提示。



1.1 常规提示

这份安装说明书是总共4份说明书中的第1部分。文档的扉页上注有说明书的编号。

- ▶ 为确保正确安装和安全使用产品，请在安装和使用产品前仔细阅读本说明书和其他说明。
- ▶ 请确保遵循说明书的顺序和操作步骤顺序。
- ▶ 请遵守安全提示和安装规定。
- ▶ 注意组件的显示元件：龙头上的 LED 指示灯和底柜单元的显示屏。
- ▶ 保存好说明书和产品信息，以备日后使用或下一位所有者参考。
- ▶ 如果在运输过程中出现损坏，请勿连接龙头。

1.2 产品使用范围

本龙头适合在私人家庭环境里使用。它专为在澳大利亚和中国 (包括香港) 使用而设计。

使用本龙头的前提条件是：

- 与 BLANCO CHOICE 底柜单元一起使用。
- 在家庭环境的封闭房间里使用，通常是厨房。

任何违背或超出指定用途范围的使用方式均被视作滥用。对于因滥用而造成的损坏/损失，BLANCO 不承担任何责任。

1.3 用户群体限制

8岁或以上的儿童以及身体、感官或精神能力下降或缺乏经验和知识的人只能在监督下使用本龙头，或者如果他们接受了关于安全使用龙头的适当指导，并且理解了相关的风险和危害后，则也可以自行使用本龙头。不允许将龙头当作儿童的玩具。儿童不得在没有监督的情况下对本龙头进行清洁或维护。

1.4 安装注意事项

注意！

注意清洁！处理不慎可能导致水被污染！

- 保持过水部件 (密封件、软管接口、螺纹) 清洁。只能用彻底清洁的手触摸这些零件。
- 安装后，不要接触任何与饮用水接触的表面。

1.5 使用注意事项



警告

窒息危险！

儿童可能会把包装材料套在头上或裹住头部，从而引起窒息！

- 将包装材料放在远离儿童的地方。
- 不要让儿童把包装材料当作玩具。

儿童可能会吸入或吞咽小零件并因此窒息！

- 将小零件放在远离儿童的地方。
- 不要让儿童把小零件当作玩具。

2. 避免财产损失

损坏、不正确的安装和维修方式都可能导致泄漏和严重的财产损失。

- ▶ 只有经过培训的专业人员才能安装和连接龙头。对于因安装方式不当或不专业而造成的损失，BLANCO 不承担责任。
- ▶ 在敷设电缆和软管时，必须确保不会出现损坏。若有使用垃圾处理系统，尤其要注意不能卡住或损坏电线和软管。
- ▶ 切勿使用已损坏的龙头。
- ▶ 只有经过培训的专业人员才能对龙头进行维修。
- ▶ 请专业人员更换损坏的部件。
- ▶ 修理龙头时，只能使用原装备件。

3. 环境保护

产品的包装材料均为环保材料且可回收。

- ▶ 请分门别类地分离并丢弃各个部件。




4. 安装和连接

4.1 供货范围

打开包装后，请检查所有部件是否存在运输损坏，是否完整。交货内容包括图中所示的部件和两份说明书。

如果您有不满，请联系您的经销商或我们的客户服务部门 → 见末页。

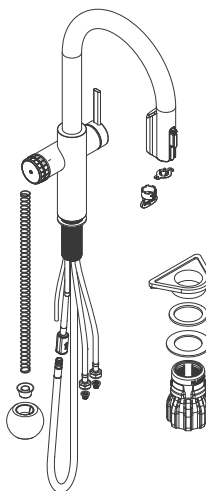

4.2 安装地点相关要求

接水要求

- 稳定的饮用水质量
- 水压恒定

热水角阀

- 最高温度 70 °C (158 °F)
- 最大压力 10 bar (145 psi)

冷水角阀

- 温度 5 - 30 °C (40 - 86 °F)
- 压力 1 - 10 bar (14.5 - 145 psi)


对龙头开孔的要求

水槽或台面必须有直径为 35 毫米 (1又3/8英寸) 的龙头开孔。台面的最大厚度：50 毫米 (1又15/16英寸)。

4.3 安装龙头




观看视频,了解完整组装过程的分步说明:
blanco.com/install-choice



所需的工具:


- 管钳
- 活动扳手

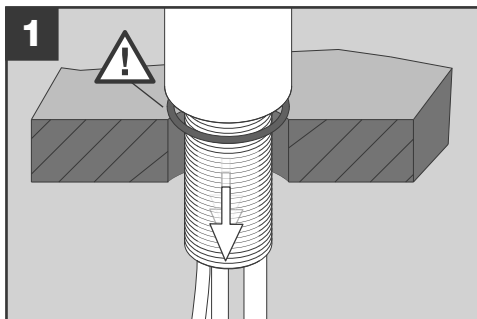

将龙头插到龙头孔里。


注意!

请确保密封圈的位置正确!

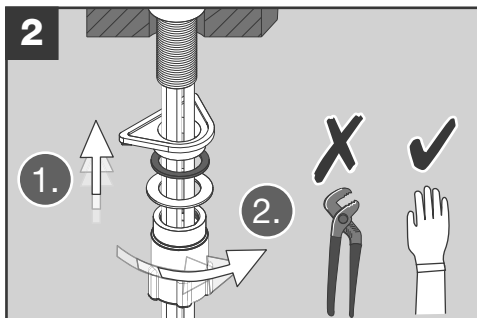

使用安装套件安装水龙头。

首先将装配螺母向上推,然后用手拧紧。

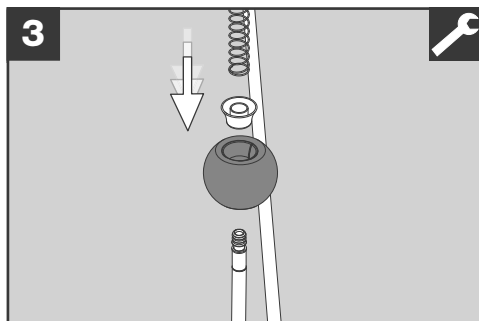


按正确的顺序将三个组件推到淋浴软管上：


- 首先球形配重，
- 然后塞上塞子，
- 最后，螺旋弹簧。

提示！


淋浴软管必须以这样的方式放置在底柜中，使得球形配重可以在软管上自由滑动并且不会被卡在任何一个地方！

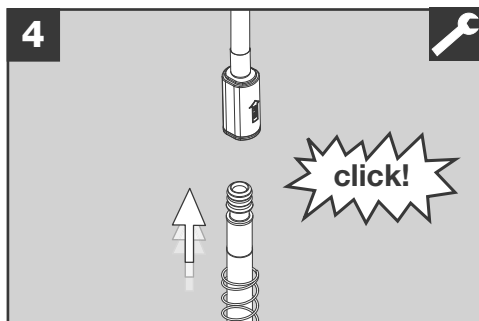

将淋浴软管插入接头。

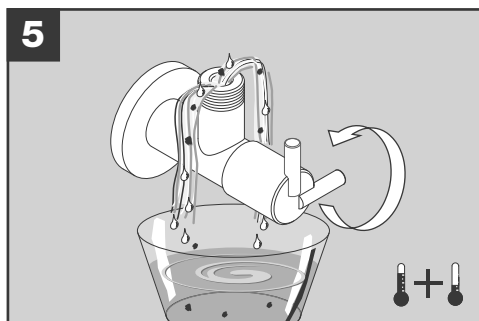

冲洗两个角阀，直到流出的是干净的水。

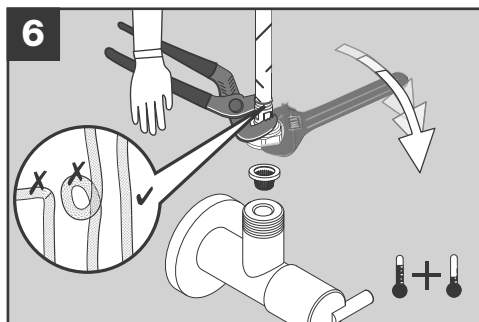


注意！

软管不可以被弯折或扭结！

- 安装龙头进水软管，使其平直，并在拧紧螺母时防止其被弯折或扭结。确保已插入一个筛网密封垫。

- 将红色进水软管安装到热水角阀（左侧）上。
- 将蓝色进水软管安装到冷水角阀上（右侧）。

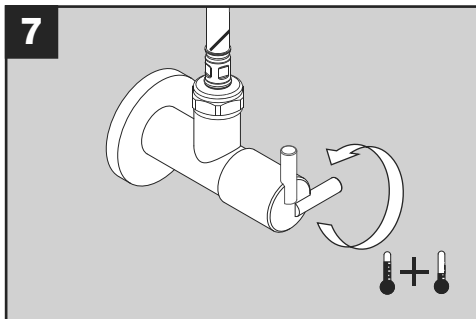


完全打开两个角阀。


注意！

检查所有连接的密封性！


4.4 龙头的首次使用

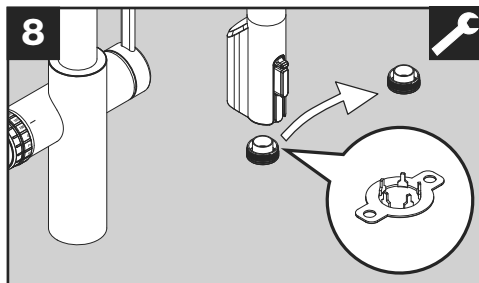

拆下花洒头上的起泡器 (龙头随附有扳手)。

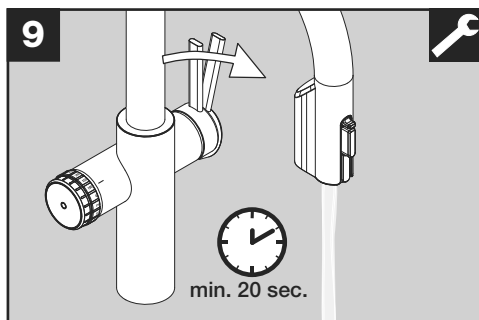

冲洗龙头和管道, 至少20秒 (热水和冷水)。

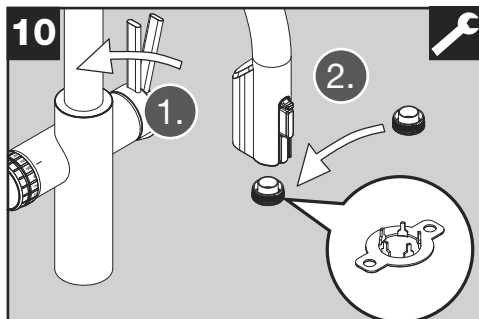

关闭手柄, 重新安装起泡器。



继续组装底柜单元: → 见说明书2

5. 停止使用

- ▶ 关闭两个角阀。
- ▶ 关闭底柜单元和/或拔出电源插头。



小心

灼伤危险!

底柜单元背面和水龙头底部的连接套管以及连接到水龙头的红色连接线可能非常热。接触高温表面会导致灼伤!

- ▶ 切勿徒手接触高温表面。
- ▶ 拔下电源插头后, 让系统充分冷却。

注意!

断开导水管道/软管时, 可能会有少量的水溢出!

- ▶ 拧下角阀上的龙头进水软管。
- ▶ 松开龙头或底柜单元上的蓝色和红色塑料软管。为此, 需要按下环形扣, 松开连接件。
- ▶ 拔下底柜单元的信号线。
- ▶ 断开抽拉软管连接并卸下抽拉软管配重。
- ▶ 松开装配螺母, 取下龙头。

6. 龙头的废弃处理

法定义务要求您避免浪费、保护您自身的健康并且保护环境:

- ▶ 将产品送到收集点。切勿将产品作为一般生活垃圾处理。



7. 客户服务

如果您有不满, 请联系您的经销商或我们的客户服务部门 → 见末页。

更多信息和备件请查看 BLANCO 网络商店:
blanco.com/shop-choice





blanco.com/contact-choice

BLANCO AUSTRALIA PTY LTD
Service AU
Phone: +61 75 5960 894
blanco@t2services.com.au

铂浪高贸易（上海）有限公司
中国服务商
电话：+86 400-788-2100
info-blancochina@blanco.de