

iQ300, Induction cooktop, 60 cm, surface mount with frame EH675LDC1E



frySensor Plus – no more burning thanks to automatic temperature control. A convenient automatic frying program with 4 power levels and 9 automatic programs.

- ✓ Space for extra-large pots and pans thanks to the extendable 32 cm three-ring cooking zone.
- ✓ dual lightSlider – Just touch and slide to control your hob.
- ✓ frySensor Plus – No more burning or scorching your meals.
- ✓ powerBoost – Increases the power of an induction zone.
- ✓ Switch off timer – Safely shuts off the cooking zone.

Product name/family: ..... Cooking zone ceramic  
Built-in / Free-standing: ..... Built-in  
Source of energy: ..... Electric  
Total number of positions that can be used at the same time: 3  
Required niche size for installation (HxWxD): ..... 51 x 560-560 x 490-500 mm  
Width of the appliance: ..... 602 mm  
Dimensions (HxWxD): ..... 51x602x520 mm  
Dimensions of the packed product: ..... 126x753x603 mm  
Net weight: ..... 13.0 kg  
Gross weight: ..... 14.8 kg  
Residual heat indicator: .....separate  
Location of control panel: ..... Front  
Basic surface material: ..... Ceramic  
Color of surface: ..... Black, Alu, brushed  
Length electrical supply cord: ..... 110 cm  
EAN code: .....4242003697962  
Voltage: .....220-240 V  
Frequency: .....60; 50 Hz



- HZ394301 Connecting strip
- HZ9SE030 Set of 2 pots and 1 pan

## iQ300, Induction cooktop, 60 cm, surface mount with frame EH675LDC1E

- 60 cm cooktop: space for 3 pots or pans

### Flexibility of cooking zones

- Ring zone triple: space for extra large cookware (e.g. paella pans) on the expandable cooking zone.
- Cooking zone rear left: 320 mm, 260 mm, 210 mm, 3.3 KW (max. power 3.7 KW)
- Cooking zone rear right: 145 mm, 1.4 KW (max power 2.2 KW)
- Cooking zone front right: 210 mm, 2.2 KW (max. power 3.7 KW)

### Comfort & Convenience

- Dual LightSlider: directly control the power on the two illuminated touch bars (invisible when switched off).
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Keep warm function: keep dishes warm at preset low power level.
- LED display and timer with auto switch off for all cooking zones: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).
- Count-up timer: shows how much time has passed since starting the timer (e.g. for potatoes).

### Time saving & efficiency

- powerBoost for all zones: boil water faster with up to 50% more power than at the highest standard level.
- panBoost: heat up pans more quickly than at the highest standard level while protecting the pan coating.
- quickStart: Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- reStart - Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.

### Cooking assistance

- FryingSensor with 5 temperature settings: prevents scorching with the automatic temperature regulation of the integrated sensor.

### Design

- Black ceramic glass with stainless steel side profiles and beveled front


### Safety

- 2-stage (h/H) digital residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- wipeProtection function: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction.
- Energy consumption display: shows the electricity consumption of the last cooking process.

### Installation

- Dimensions of the product (HxWxD mm): 51 x 602 x 520
- Required niche size for installation (HxWxD mm) : 51 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- powerManagement Function: enables the total power of the cooktop to be limited if necessary (for suitability and installation, consult a licensed electrician).
- Power cord: 1.1 m, Cable included

iQ300, Induction cooktop, 60 cm,  
surface mount with frame  
EH675LDC1E

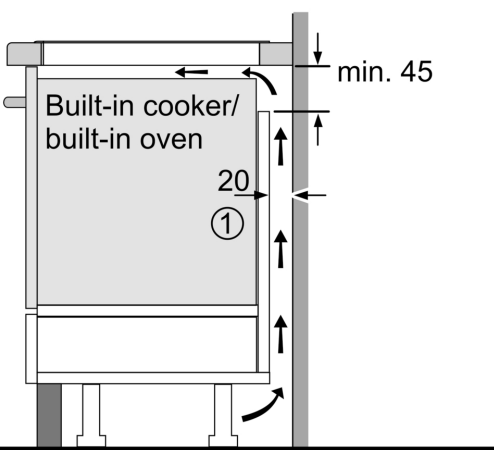

Built-in cooker/  
built-in oven


20

①

min. 45

①  
Ventilation gap must  
be present


All measurements in mm

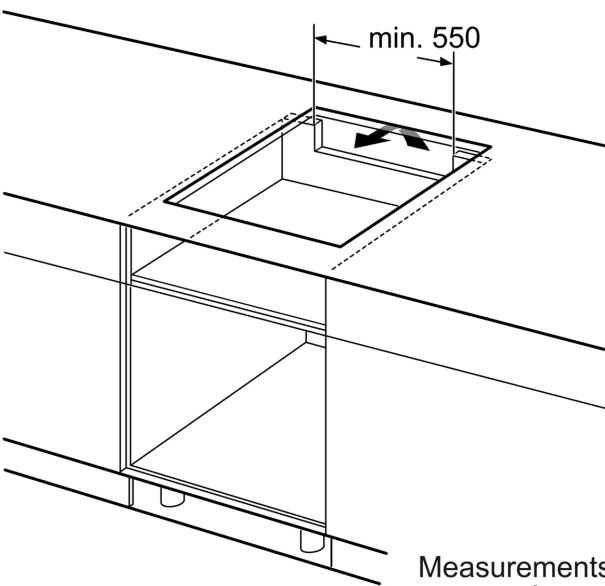

min. 550

Measurements  
in mm

measurements in mm



520 602

51 (B)

≥ 16 (C)

560 (E)


490-500 (D)

①

A: Minimum distance from the hob cut-out to the wall.  
B: Recessed depth  
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

| D       | E    | F    |
|---------|------|------|
| 585-600 | 50   | ≥ 35 |
| > 600   | ≥ 50 | ≥ 50 |

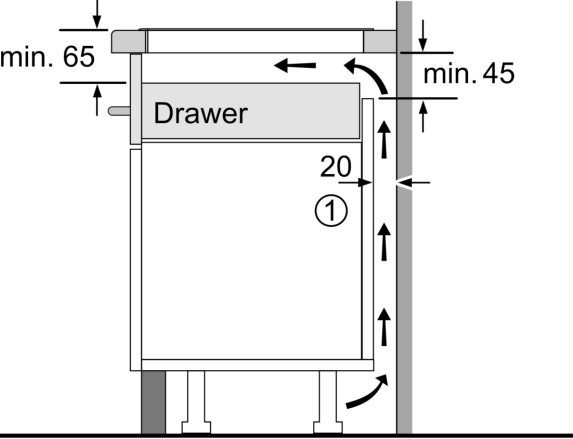

min. 65

min. 45

Drawer

20

①

①  
Ventilation gap must  
be present.

Measurements in mm

