

**Series 6, integrated rangehood, 70 cm, Black  
DLN77AC60A**



**The undermount rangehood offers you flexibility in your kitchen planning, all with sleek styling and excellent performance – now in a brand new black colour, matching modern kitchens with Induction, Ceramic, and black-glass Gas Cooktops.**

- **Seamless integration:** thanks to near flush installation, the canopy rangehood is almost invisible in upper cabinets.
- **LED illumination:** The energy-saving lighting provides a clear and bright illumination for the hob area.
- **Push button control:** effortless hood operation with real push buttons.
- **Intensive speed setting with reset:** automatically resets the hood to normal speed setting

|           |                                          |
|-----------|------------------------------------------|
| DHZ5316   | Standard odor filter (replacement)       |
| DHZ5605   | Standard recirculation kit               |
| DWZ0IT0P0 | Long Life odor filter (replacement)      |
| DWZ1IT1D1 | Long Life recirculation kit external     |
| DWZ1IX1B6 | Clean Air Plus odor filter (replacement) |
| DWZ1IX1C6 | Clean Air Plus recirc. kit external      |

Typology: ..... Built-in/Built-under  
Length electrical supply cord: ..... 150.0 cm  
Required niche size for installation (HxWxD): ... 345mm x 676.0mm x 264mm mm  
Minimum distance above an electric cooktop: ..... 600 mm  
Minimum distance above a gas cooktop: ..... 650 mm  
Net weight: ..... 11.3 kg  
Type of control: ..... Electronic  
Number of power settings: ..... 3-stages + intensive setting  
Max. air extraction: ..... 595 m<sup>3</sup>/h  
Boost position output recirculating: ..... 705 m<sup>3</sup>/h  
Max. air recirculation: ..... 580 m<sup>3</sup>/h  
Boost position air extraction: ..... 730 m<sup>3</sup>/h  
Number of lights: ..... 2  
Noise level: ..... 63 dB(A) re 1pW  
Diameter of air outlet: ..... 120 / 150 mm  
Grease filter material: ..... Washable aluminium  
EAN code: ..... 4242005475636  
Connection rating: ..... 252 W  
Fuse protection: ..... 3 A  
Voltage: ..... 220-240 V  
Frequency: ..... 60; 50 Hz  
Plug type: ..... AU plug  
Installation typology: ..... Built-in



## **Series 6, integrated rangehood, 70 cm, Black DLN77AC60A**

**The undermount rangehood offers you flexibility in your kitchen planning, all with sleek styling and excellent performance – now in a brand new black colour, matching modern kitchens with Induction, Ceramic, and black-glass Gas Cooktops.**

- Appliance dimensions (HxWxD): 345 x 700 x 282 mm
- Dimensions recirculating (HxWxD): 345-345 x 700 x 282 mm
- Installation dimensions (HxWxD): 345 x 676 x 264 mm
- Please reference the built-in dimensions provided in the installation drawings
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- with one-way flap: prevents outside air from entering your kitchen

### **Design:**

- For installation in a kitchen cabinet
- Flush-fitted installation for a seamless integration in wall cupboards.
- Suitable for ducted or re-circulated extraction
- For recirculated extraction various recirculation kits are available as optional accessories.

### **Features:**

- 2 x 1 Watt LED lights
- Colour Temperature: 4000 K
- Light Intensity: 400 lux
- Capacitor motor
- 2 metal grease filter(s).

### **Comfort Features:**

- Electronic controls with low-lift push buttons
- 3 power settings plus intensive setting
- Automatic reset from intensive to normal setting after 6 min

### **Cleaning Comfort:**

- Metal grease filter dishwasher-safe
- Easy to clean smooth surfaces and materials.

### **Performance Exhaust:**

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 270 m<sup>3</sup>/h; noise level 45 dB (A) re1pW Speed 2: extraction rate 400 m<sup>3</sup>/h; noise level 53 dB (A) re1pW Speed 3: extraction rate 595 m<sup>3</sup>/h; noise level 63 dB (A) re1pW Intensive 1: extraction rate 730 m<sup>3</sup>/h; noise level 68 dB (A) re1pW

### **Performance Recirculation:**

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory):
- Speed 1: extraction rate 250 m<sup>3</sup>/h; noise level 65 dB(A) re1pW
- Speed 2: extraction rate 350 m<sup>3</sup>/h; noise level 71 dB(A) re1pW
- Speed 3: extraction rate 400 m<sup>3</sup>/h ; noise level 74 dB(A) re1pW
- Intensive Speed 1: extraction rate 430 m<sup>3</sup>/h; noise level 75 dB (A) re1pW


### **Technical Information:**

- Power rating: 252 W
- Voltage: 220 - 240 V
- Expanded plastic free packaging


### **Planning and Installation Information:**

**Series 6, integrated rangehood, 70  
cm, Black  
DLN77AC60A**


Measurements in mm

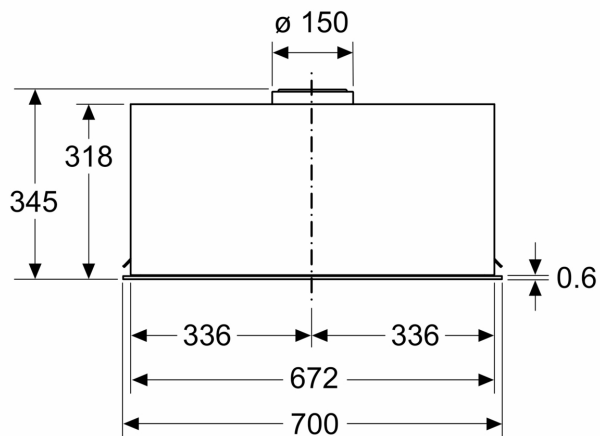


Measurements in mm

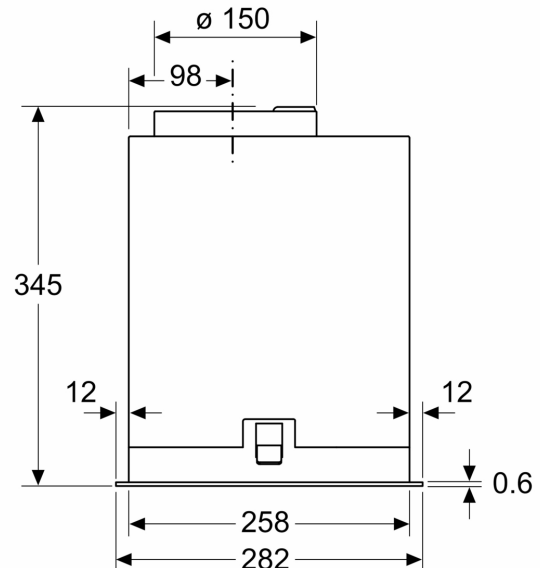

Measurements in mm

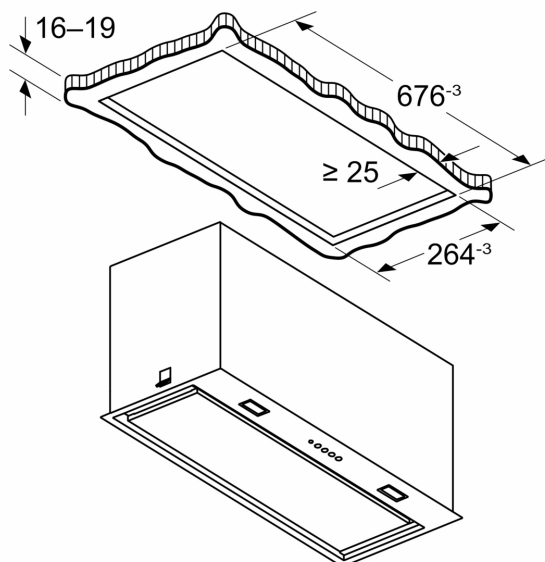

Measurements in mm

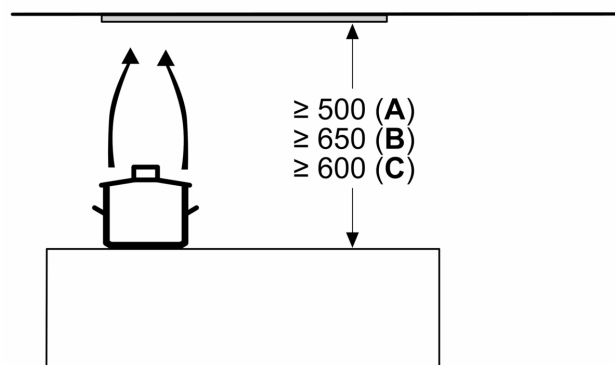

**A:** Electric

**B:** Gas - from upper edge of pan support

**C:** Electric - for Australia and New Zealand