


iQ700, downdraft hood, 90 cm, clear glass, Black LD98WMM66



The seamlessly designed glassdraftAir is only visible when in use, with an impressive performance thanks to the new Guided Air technology.

- ✓ Guided Air technology – Delivers even, quiet extraction from any cooking zone.
- ✓ cookConnect system with climateControl sensor – Detects steam and odours to adjust the power level automatically.
- ✓ iQdrive motor – Delivers powerful extraction, quiet operation, and long-lasting performance.
- ✓ emotionLight Pro – Select LED colours via the Home Connect app to highlight your rangehood.
- ✓ Space saving installation – Flexible rangehood motor placement maximises space under the benchtop.

Features

Technical Data

Typology : Downdraft
 Length electrical supply cord : 130 cm
 Required niche size for installation (HxWxD) : 703mm x 854.0mm x 123mm mm
 Minimum distance above an electric cooktop : 600 mm
 Net weight : 39.7 kg
 Type of control : Electronic
 Number of power settings : 3-stages + 2 intensive settings
 Maximum output air extraction : 519 m³/h
 Boost position output recirculating : 596 m³/h
 Maximum output recirculating air : 456 m³/h
 Boost position air extraction : 833 m³/h
 Noise level : 62 dB(A) re 1pW
 Diameter of air outlet : 150 mm
 Grease filter material : Washable stainless steel
 EAN code : 4242003877319
 Connection Rating : 300 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : No plug (electrical connection by electrician)
 Installation type : Built-in



4 242003 877319

iQ700, downdraft hood, 90 cm, clear glass, Black LD98WMM66

Features

Variant

- 90 cm wide
- For installation in a kitchen cabinet
- Perfect for installation in an island or semi-island kitchen solution
- Suitable for ducted or recirculated extraction
- For recirculated extraction Clean Air Plus recirculation kit (accessory) needed

Design

- The clear glass panel provides a glass edge lighting and is extendable via lift motor
- edges illuminated

Comfort

- Electronic metal soft-touch controls with LED indicators
- The standard functions are located on the right-hand user interface
- touchControl for power and light
- 3 power levels + 2 intensive levels
- Intensive setting with automatic reset function
- Automatic after running (10 minutes)
- Air Quality sensor
- cooktop-based rangehood control (with matching cooktop)

Cleaning

- emotionLight Pro
- The high quality filter cassettes with integrated metal grease filters are dishwasher safe.
- Dishwasher safe Metal grease filters
- Saturation display for filters
- The filter service button automatically lifts filters into service position for easy removal
- The glass panel can be easily removed and cleaned

Connectivity

- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants
- interval function: available via Home Connect
- silence function: available via Home Connect

Performance

- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 519 m³/h. Intensive 833 m³/h
- Extraction rate exhaust air according to EN 61591:
- max. normal use 519 m³/h, intensive 833 m³/h
- Noise level according to EN 60704-3 exhaust air:
- Max. normal use: 62dB(A) re 1 pW
- Intensive: 71 dB(A) re 1 pW
- Maximum extraction 833 m³/h
- Extraction rate exhaust air according to EN 61591: max. 833 m³/h
- Noise min./max. Normal Level: 41/62 dB
- With the Clean Air Plus recirculation kit (available as accessory) your appliances reaches:
- Extraction rate in recirculation mode:
- Max. normal use: 456m³/h







- Intensive: 596m³/h
- Noise level in recirculation mode:
- Max. normal use: 66dB(A) re 1 pW
- Intensive: 71 dB(A) re 1 pW
- iQdrive: Efficient BLDC technology

Planning and installation information

- For seamless worktop installation a special accessory is required
- Suitable for installation into 90 cm cabinet
- Extension height 250 mm
- Appliance dimensions (HxWxD): 709 x 912 x 140 mm
- Installation dimensions (HxWxD): 703 x 854 x 123 mm
- 150 mm diameter pipe
- Electrical cable length 1.3 m
- Please reference the built-in dimensions provided in the installation drawings
- Combination with gas cooktops not allowed


iQ700, downdraft hood, 90 cm, clear glass, Black
LD98WMM66

Dimensioned drawings

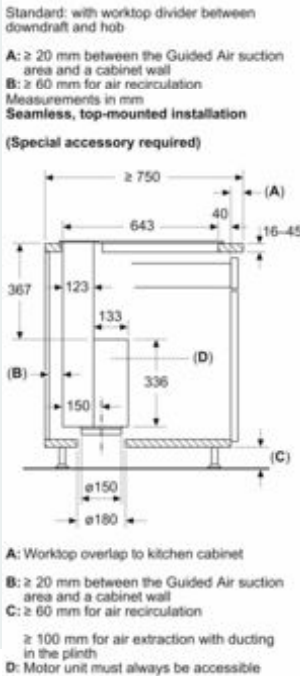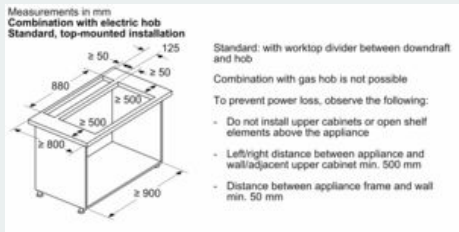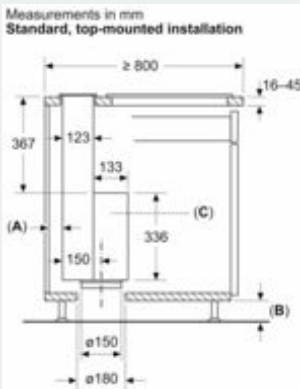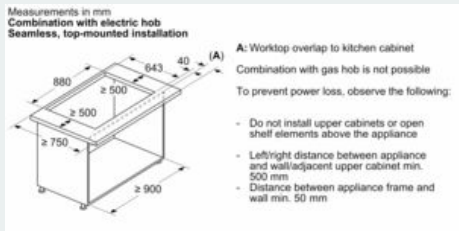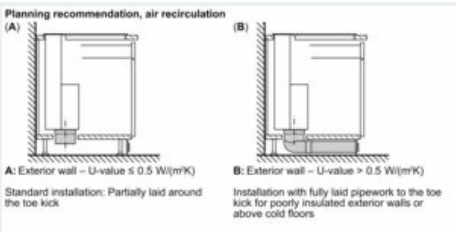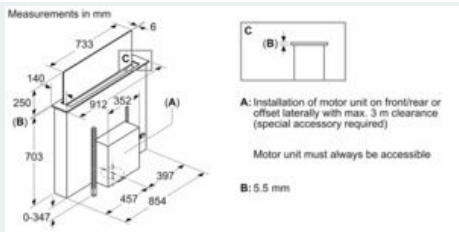


iQ700, downdraft hood, 90 cm, clear glass, Black
LD98WMM66

Dimensioned drawings

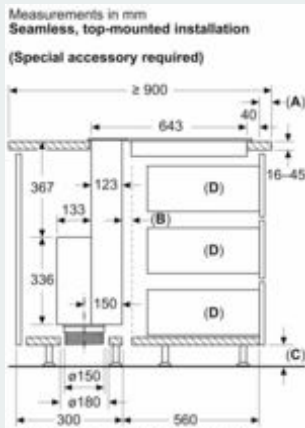

A: Worktop overlap to kitchen cabinet

B: Ventilation gap for hob

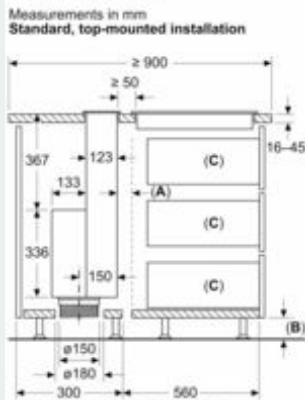


Standard: with worktop divider between downdraft and hob

A: Ventilation gap for hob

B: ≥ 60 mm for air recirculation

Measurements in mm
Combination with electric hob
Standard, top-mounted installation




Standard: with worktop divider between downdraft and hob

Combination with gas hob is not possible

To prevent power loss, observe the following:

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm

Measurements in mm
Combination with electric hob
Seamless, top-mounted installation



A: Worktop overlap to kitchen cabinet

Combination with gas hob is not possible

To prevent power loss, observe the following:

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm