


DWAI6D15XT3

Dishwashers, Universale, Partially-integrated built-in, 60 cm, Number of place settings: 15 AU, Stainless steel

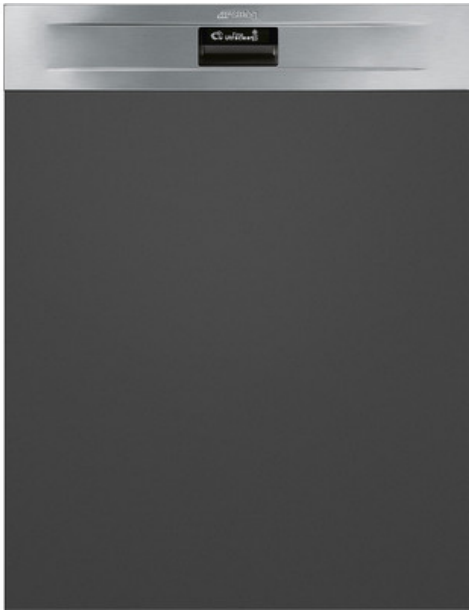

TYPE

Product Family: Dishwashers • Commercial height: 86 cm • Number of place settings: 15 AU • Installation: Partially-integrated built-in • Commercial width: 60 cm • Kitchen panel: Not supplied • EAN code: 8017709297152

AESTHETICS

Color: Stainless steel • Finishing: Fingerproof • Aesthetics: Universale • Front panel colour: Finger friendly stainless steel • Door type: Silver (oropal) • LED/display colour: White • Buttons colour: Silver (oropal grey)

PROGRAMS / FUNCTIONS

N. of programmes: 10 • Soak: Yes • Express 27': Yes • Full express - 60 minutes: Sì • Quiet (-2 dB): Yes • Auto sensor 45-65: Yes • Intense: Yes • Sterilise: Yes • Regular: Yes • Normal ECO: Yes • Crystal: Yes • Washing temperatures: 38, 45, 50, 55, 65, 70, 75 °C

OPTIONS

Dry Assist+ option: Yes • Delay timer option: Up to 24 hours • 1/2 load FlexiZone option: Yes • Options for tabs FlexiTabs: Yes • Special programs option: Si

BASKETS

N° baskets: 3, FlexiDuo • Basket colour: Grey • Basket components colour: Grey • Handle: In plastic with stainless steel insert on upper and lower basket • Upper Basket: With 3 foldable racks • Height adjustment of the upper basket: On three levels • Sliding Guides Extra Glide: Yes • Lower Basket: With completely foldable racks and glass holder • Largest loadable dish in upper basket: 19,0 cm • Lower basket with anti-drip inserts: Yes • Largest loadable dish in lower basket: 35,0 cm • Cutlery basket: 13 place settings sliding • Colour Inner Components: Blue

TECHNICAL FEATURES

Controls: Electronic • Display: Delayed start, Programme time indicator, Time to end indication, Dynamics programme time indicator • Door opening system: Yes • Display type: LED display • Rinse aid indicator: Light • End of cycle indicator: On display, with acoustic signal • Washing system: Planetarium • Drying system: Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle • Motor: Inverter • Third spray arm: Single • Turbidity sensor Aquatest: Yes • Flood protection system: Total Acquastop • Water supply: Single; cold/hot water max. 60°C - energysave with hot water up to 35% • Max water hardness: 100°FH;58°dH • Steam protection: In plastic • Internal light: With White led • Tub material: Stainless steel • Filter: Stainless steel • Concealed heating element: Yes • Min. and max plinth height: 100 - 215 mm • Hinges: Self balancing with variable hinges • Adjustable feet: 7cm, from 860 to 930 mm • Back feet adjustable from front: Yes

PERFORMANCE / ENERGY LABEL

Noise level: 42 dB(A) re 1pW • Water consumption per cycle (l/cycle): 9.5 l • Annual energy consumption: 240 kWh/a • Reference programme: Normal ECO • Total cycle time of reference programme (min): 142 min • Duration of the stand by on mode (min): 5 min • Energy Label ex EU: Energy rating: 3.5 stars - Water rating: 6 stars

PERFORMANCE / ENERGY LABEL NEW

ELECTRICAL CONNECTION

Connected power: 1800 W • Voltage: 220-240 V • Type of connection: Single-phase • Frequency (Hz): 50 Hz • Power supply cable length: 140 cm

FEATURES ATTRIBUTES

Noise level: 40 - 44 dB(A)

ALSO AVAILABLE

LOGISTIC INFORMATION

Dimensions of the product HxWxD (mm): 858x598x547 • Net weight (kg): 47.000 kg • Gross weight (kg): 50.000 kg

