


iQ700, Built-in oven, 60 x 60 cm,  
Matt Black  
HB976GMM1

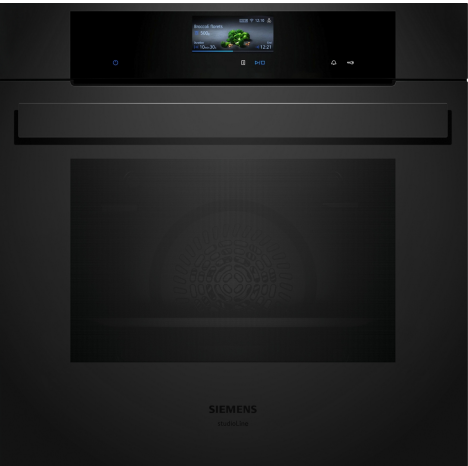

|          |                                         |
|----------|-----------------------------------------|
| HZ327000 | Baking stone                            |
| HZ629070 | Air Fry & Grill tray                    |
| HZ631070 | Baking tray, enamelled                  |
| HZ638070 | Full ext rails, level independent, pyro |
| HZ65MA00 | Assembly kit for vertical installation  |

The intelligent oven with Cooking Assistant for intuitive programme setting, activeClean for less effort in oven cleaning and roastingSensor Plus for excellent results.

- ✓ Matt Edition – the understated elegance of black matte appliances.
- ✓ TFT-Touchdisplay Plus – Smooth-touch navigation for simple and intuitive operation.
- ✓ cookControl Pro – Excellent results, whatever the recipe or circumstances.
- ✓ Cooking Assistant – Intuitively set the right programme.
- ✓ activeClean® – The automatic, self-cleaning oven system for less efforts in oven cleaning.

Color / Material Front: ..... Matt Black  
Built-in / Free-standing: ..... Built-in  
Door opening: ..... Drop down  
Cleaning : .....Pyrolytic+Hydrolytic  
Control Panel Material: .....Glass  
Door Material: .....Glass  
Dimensions (HxWxD): .....595x594x548 mm  
Dimensions of the packed product: .....670x670x680 mm  
Required niche size for installation (HxWxD): ..585-595 x 560-568 x 550 mm  
Cavity dimensions: .....357 x 480 x 415 mm  
Usable volume of cavity: ..... 71 l  
Net weight: ..... 39.3 kg  
Gross weight: ..... 41.8 kg  
EAN code: .....4242003982853  
Power supply: ..... 3600 W  
Fuse protection: .....16 A  
Voltage: .....220-240 V  
Frequency: .....50; 60 Hz  
Length electrical supply cord: ..... 120 cm



## iQ700, Built-in oven, 60 x 60 cm, Matt Black HB976GMM1

### Heating Functions

- Oven with 14 cooking functions: 4D hotAir, Top/ bottom heating, Hot air grilling, Full width grill, Half width grill, Pizza setting, coolStart (deep-frozen food special), Bottom heating, Low temperature cooking, Plate warming setting, Keep Warm, hotAir gentle, Conventional heat gentle, Air fry
- Heating methods only via Home Connect App: let rest, preheating
- Temperature range 30 °C - 300 °C
- Cavity volume: 71 net usable litres
- Cavity: smooth

### Racks and Rails

- Number of shelf levels: 5
- varioClip rails Plus, pyrolytic proof, full extension, with Stop function

### Design

- Touch control
- Cavity inner surface: enamel

### Cleaning

- activeClean® – automatic pyrolytic self-cleaning function with automatic safety door lock
- humidClean Plus program - easy cleaning of a lightly soiled cooking cavity
- Full glass inner door

### Convenience

- Cooking Assistant
- TFT-Touchdisplay Plus
- Electronic clock and timer
- Temperature proposal, Residual heat indicator, Actual temperature display, Meat probe function
- Drop down door
- Oven door with SoftOpen and SoftClose door
- cookControl Pro
- roastingSensor Plus multipoint meat probe
- Automatic rapid heat up
- coolStart - eliminates preheating for frozen foods
- LED light
- Integrated cooling fan
- HomeConnect
- 4D hotAir: even heat distribution on any level, also simultaneously

### Accessories

- 1 x universal pan, 1 x air fry & grill tray, 1 x enamel baking tray, 1 x combination grid

### Safety Features

- Maximum door temperature 30° C
- Low door temperature during pyrolytic cleaning
- Quadruple glazed door with heat reflective glass
- Automatic door lock during pyrolysis, Child lock, Automatic safety switch-off function, Residual heat indicator, Start button, Door

contact switch

### Technical Information


- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW

### Dimensions


- Appliance dimensions (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

iQ700, Built-in oven, 60 x 60 cm,  
Matt Black  
HB976GMM1


Installing two appliances on top of each other  
Air exchange

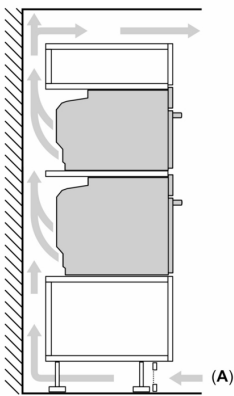

A: Air inlet  $\geq 200 \text{ cm}^2$

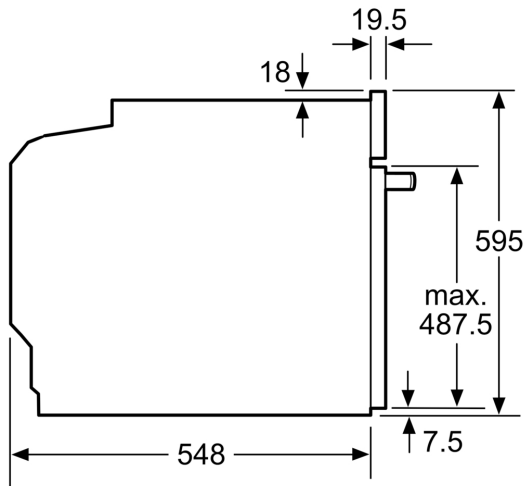

measurements in mm

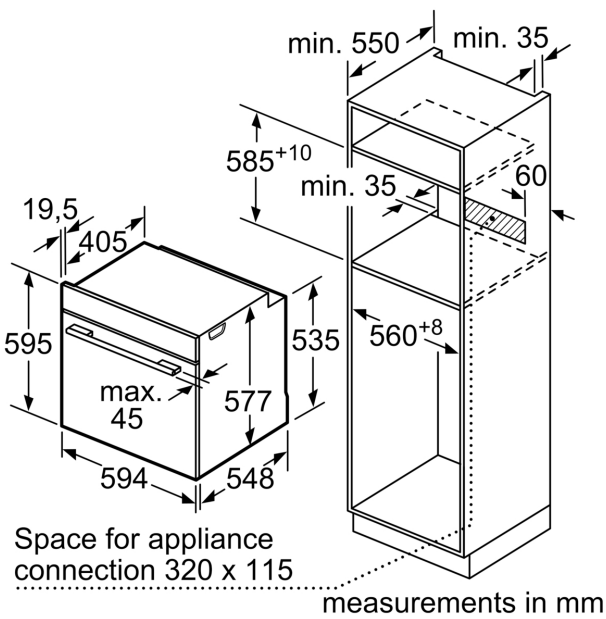

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type                   | min. worktop thickness |       |
|----------------------------|------------------------|-------|
|                            | fitted                 | flush |
| Induction hob              | 37 mm                  | 38 mm |
| Full surface Induction hob | 47 mm                  | 48 mm |
| Gas hob                    | 30 mm                  | 38 mm |
| Electric hob               | 27 mm                  | 30 mm |

