


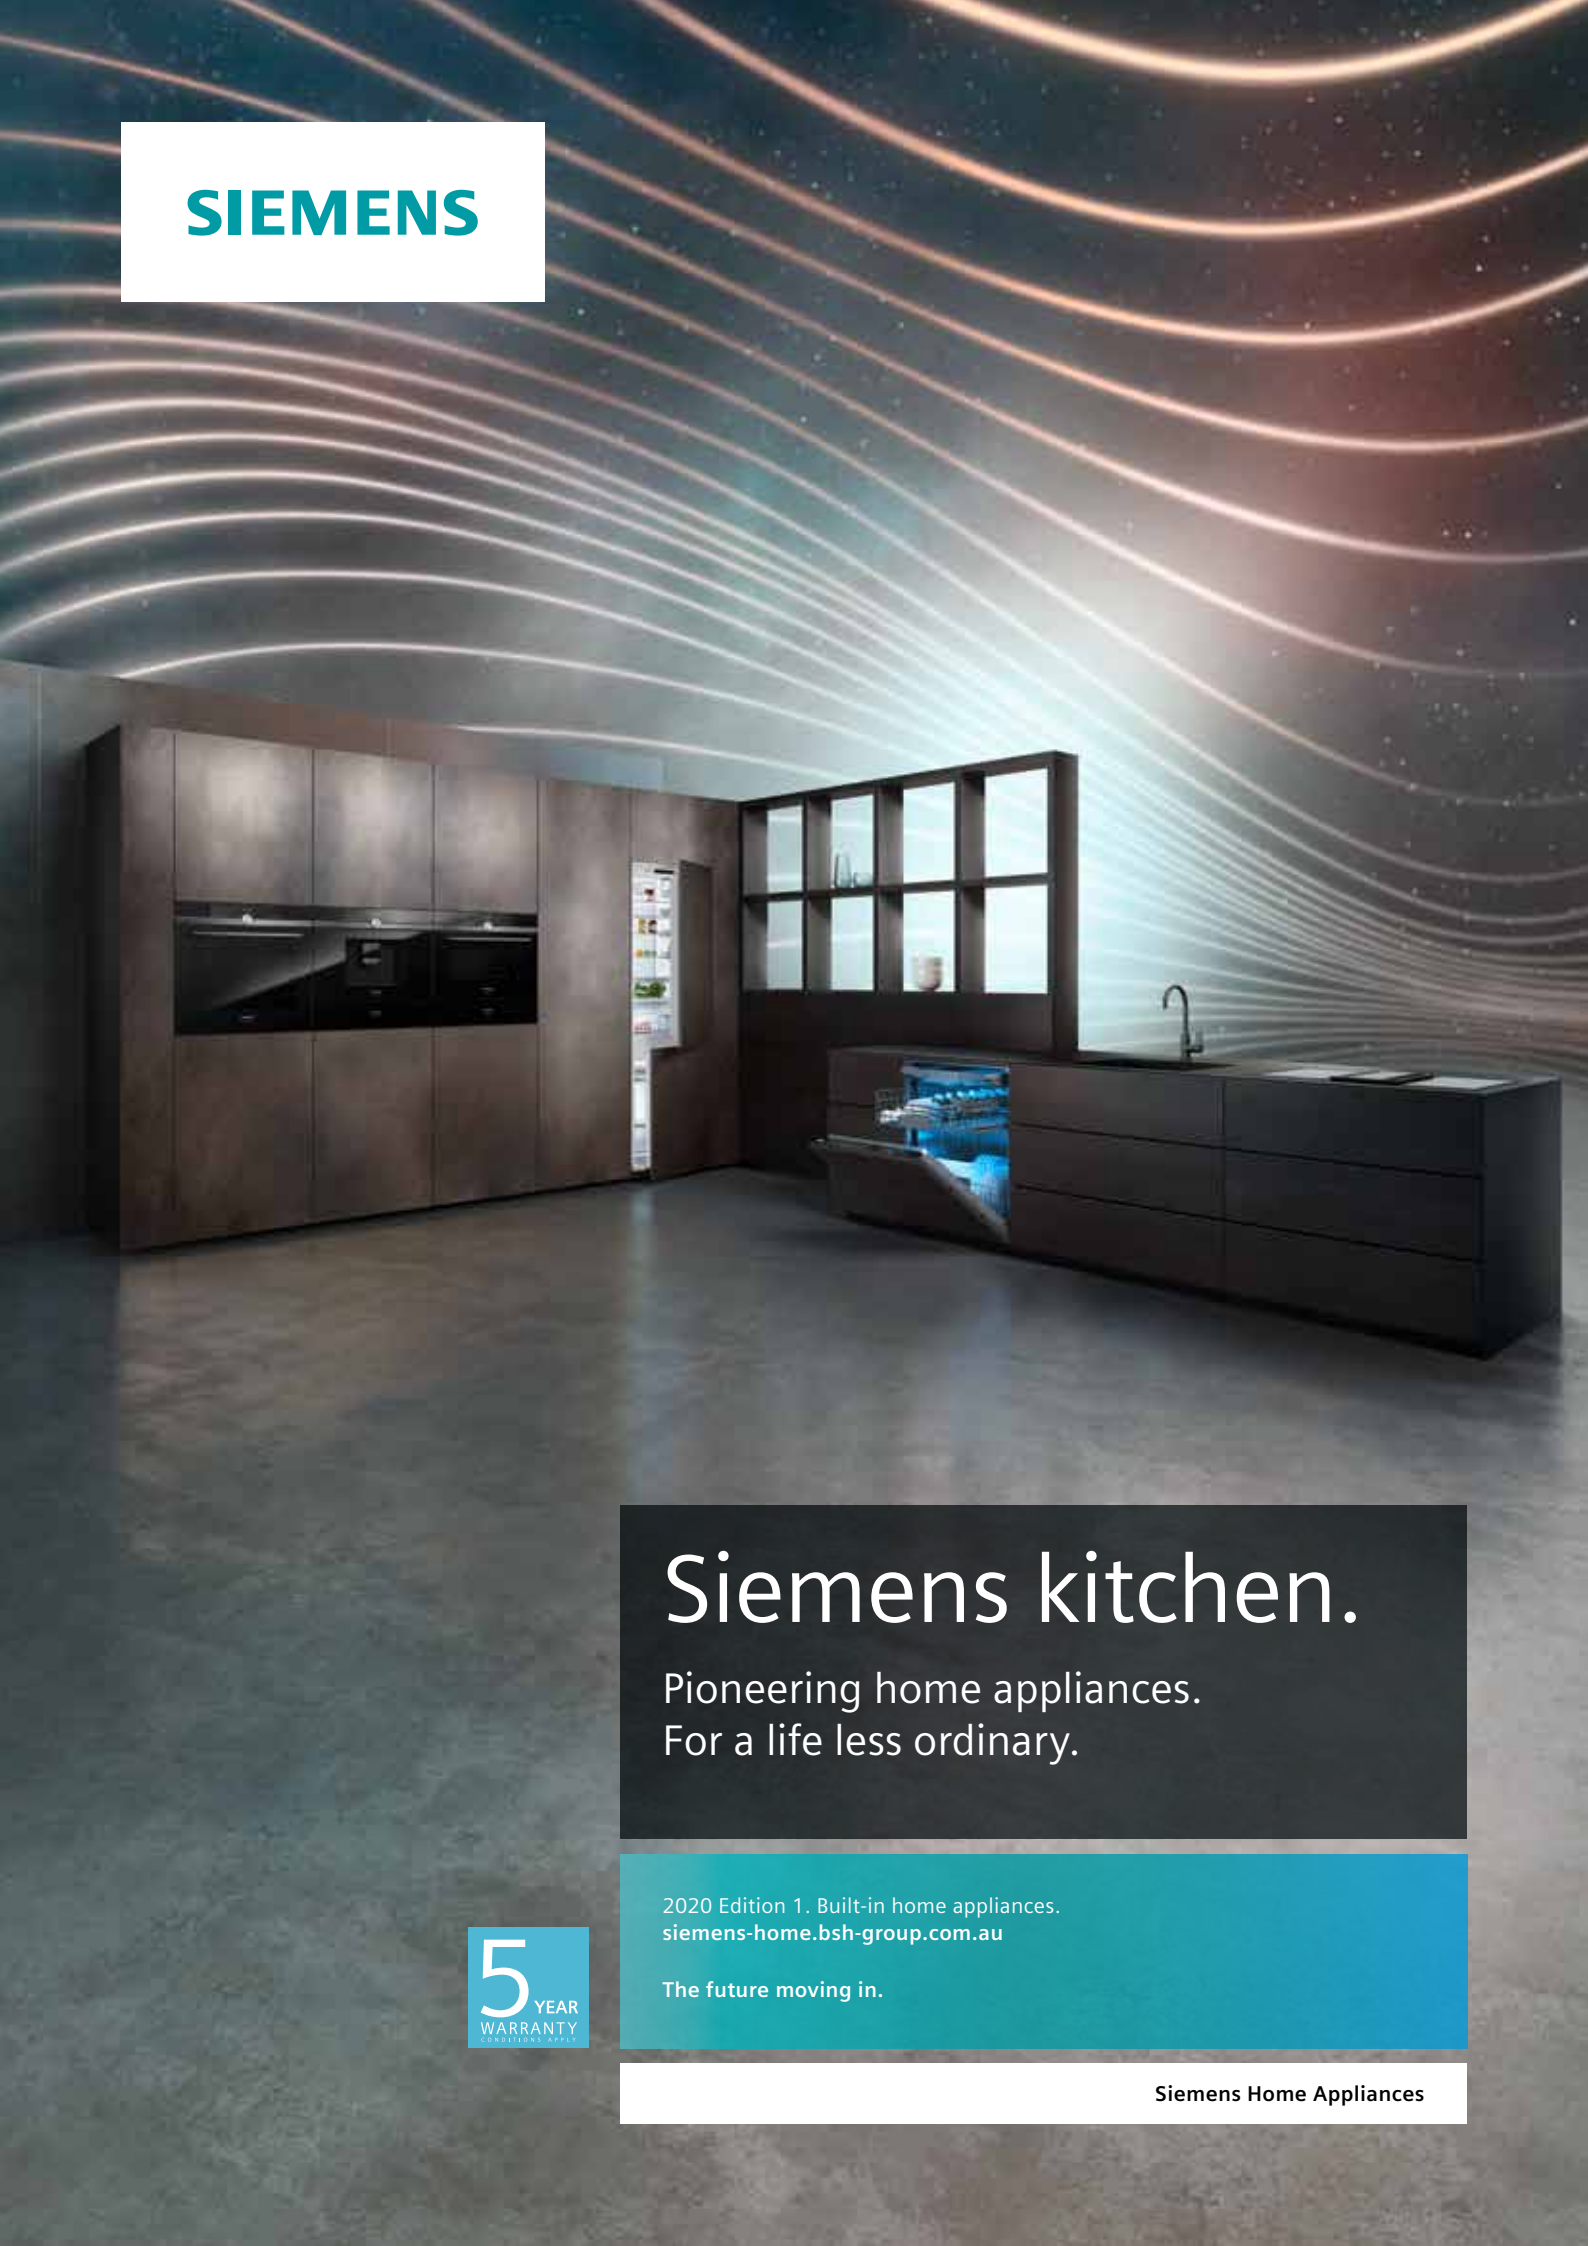

SIEMENS

Siemens kitchen.

Pioneering home appliances.
For a life less ordinary.

2020 Edition 1. Built-in home appliances.
siemens-home.bsh-group.com.au

The future moving in.



Siemens Home Appliances

A global leader in design and technology for the home.

Siemens is the great, innovative technology brand in the home appliances sector. The name stands for outstanding engineering achievements, characterised by creativity, perfection and precision. For more than 170 years now, these values have shaped the Siemens brand and provided the basis for a continuous flow of innovations, which have constantly improved people's lives.

In the sporting world it has meant the development of technologies like 'Hawk-Eye', a system that has revolutionised the umpiring of various sports. In the home, it has led to the creation of a continuous production line of highly advanced yet brilliantly simple products.



As a sign of the confidence we have in the quality, reliability and performance of our products, all Siemens kitchen appliances come with a 5 year warranty on parts and labour.



Siemens is proudly the No.1 home appliance brand in Germany. This is no accident. It is a testament to the ability of Siemens to evolve with customer needs and changing lifestyles, and to provide innovative and forward thinking appliances.

Source: Euromonitor, per Major Domestic Appliance definitions, volume brand sales, 2019



The iF Design Award is among the most prestigious and largest design competitions in the world. Since 1953, designers, manufacturers and users have looked to iF as a seal of excellence, a testimony of quality and a sign of excellent design. Siemens is proud to have been awarded nine iF Design Awards in 2018.





voiceControl


Enjoy the party instead of running around in the kitchen by using Home Connect to connect your smart speaker to your Wi-Fi enabled Siemens appliance. Why not ask your coffee machine to prepare a cappuccino, or ask "When will dinner be ready?"

It may be necessary to install Home Connect partner apps to use these functionalities.



Say hello to the future

With the Home Connect App, you can control your Wi-Fi enabled Siemens home appliances via your smartphone. Integrate your appliances with one of the growing network of partner services that turn your house into a connected home, and let connectivity redefine the everyday.

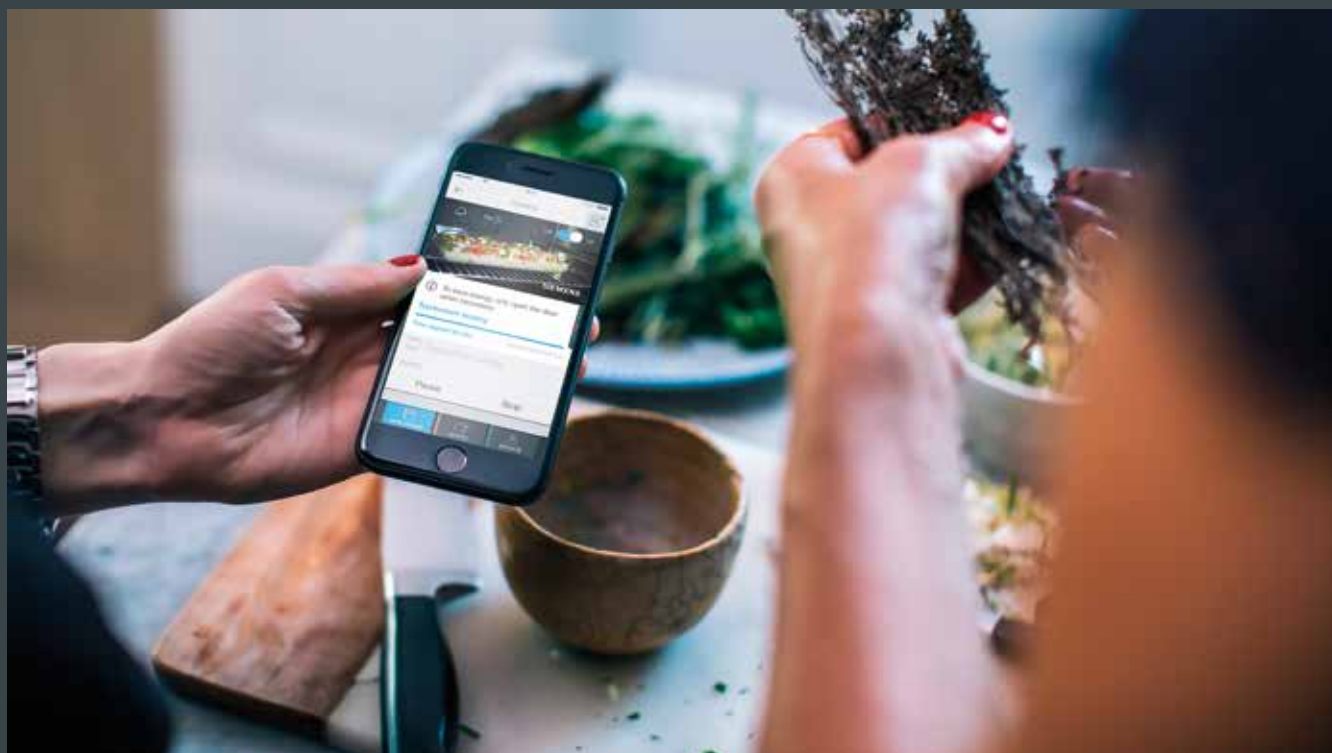

Remote Controlling and Monitoring

Ever left the house only to go back to check that you've turned off the oven? With Wi-Fi enabled Siemens cooking appliances and the Home Connect App, you can monitor and control the status of your appliance directly from your phone.

recipeWorld

Cooking at a professional level has never been easier, with an extensive selection of recipes in your Home Connect App. Once you have picked your favourite one, you can transfer the ideal settings directly to your oven, and even remotely start the heating process. Time to enjoy convenient cooking and delicious meals.

coffeeWorld and coffeePlaylist

Control your coffee machine with any smart device. Try coffeeWorld, the tech that offers an additional variety of international coffee specialities on your machine. Or use coffeePlaylist to put multiple beverages into a list and prepare them one after another.





Perfect together

All appliances in the iQ700 studioLine built-in range can be combined perfectly with each other. Thanks to the coherent front panels and continuous design lines, it doesn't matter whether you arrange the appliances side-by-side or on top of each other: the result is always pleasing to the eye.


Contents

01. Ovens	8
Ovens	12 - 14
Accessories	15
02. Companion appliances	16
Coffee machine	17
Drawers	17
03. Cooktops	18
Induction	20 - 22
Accessories	23
inductionAir flexInduction®	24 - 27
Gas	28 - 31
04. Rangehoods	32
Canopy	34
Integrated	34 - 35
Slide-out	35
05. Dishwashers	36
Fully integrated	40
Semi-integrated	40 - 41
Built-under	41
06. Cooling	42
Built-in	43
07. Range overview	44
Ovens	44 - 45
Coffee machine	46
Warming drawer and Vacuum drawer	47
Induction cooktops	48 - 49
inductionAir flexInduction®	50 - 51
Gas cooktops	52 - 53
Rangehoods	54 - 55
Dishwashers	56 - 57
Cooling	58 - 59
07. Technical diagrams	60

Ovens



Advanced automation puts you in full control.



Let automatic programs do the thinking for you.

Roast beef? Steamed artichokes? Choux pastry? Simply find your desired dish from a wide selection of pre-loaded options, enter the weight, and let your iQ700 take over. The intelligent meals function will automatically recommend the ideal mix of settings to deliver the best possible result.



Knowing when your dish is perfectly baked is now more science than art.

All that's left for you to do when baking is insert your finished ingredients, select the dish type and let the bakingSensor do the rest. Innovative sensor technology controls the baking process by monitoring moisture levels in the oven, and lets you know when your dish is just right.



Achieve the best roasting results, easier than ever before.

Thanks to three measuring points, the innovative roasting thermometer precisely monitors the internal temperature of meats and fish during cooking. Use it in combination with the microwave or pulseSteam function, and you'll be producing cooking results like never before.

Faster cooking options have arrived.

If your energetic lifestyle means you have less time for cooking, you don't have to compromise on enjoying a beautifully prepared meal. The Siemens iQ700 studioLine range gives you faster, more flexible cooking options, so you can command your time as you wish.



varioSpeed: 100% flavour in up to 50% less time. iQ700 studioLine ovens with varioSpeed make time management truly flexible. By activating the microwave alongside hot-air cooking, you can speed up the preparation of even the most sophisticated dishes by up to 50%, without losing any of the flavour or goodness.



Frozen food? Place it straight in and coolStart will do the rest.

No more pre-heating the oven. No need for thawing. Just place frozen convenience food straight in the oven, and coolStart will condense the whole process into a single cooking session. It makes frozen food preparation faster than ever.



Speed up the preparation of even the most sophisticated dishes by up to 50%, without losing any of the flavour or goodness.



Professional steam techniques at home.

Featuring simple-to-use steam functionality, iQ700 studioLine has taken this popular technique from a specialty to the forefront of home cooking.



fullSteam: The easy, healthier alternative.

A healthy alternative to cooking with fats and oils, fullSteam enables you to cook with 100% steam, ensuring all the flavour, moisture and goodness in your food is retained.



pulseSteam: For crispy crusts and juicy roasts.

When food needs browning or crisping, the injection of steam alongside hot-air is the technique of choice for the most desirable results. With pulseSteam, you can prepare perfectly crispy and juicy dishes simply and efficiently, whilst the full-size cavity models provide even more freedom and flexibility.



Sous-vide: Bring out the best in your ingredients.

For a dish that brings out the intense flavour of your best ingredients, vacuum-seal your meat, fish and vegetables in the iQ700 studioLine vacuum drawer and cook using the Sous-vide heating mode. This mode keeps the steam at a constant low temperature for longer, maintaining the moisture and texture of your food without overcooking it.

Oven cleaning at the touch of a button, rails included.



activeClean®: Pyrolytic cleaning, rails included.

Siemens activeClean® takes care of oven cleaning for you. It heats the oven interior to a very high temperature and turns all residues to ash, allowing the contents to be easily wiped away. So no matter how flamboyant it gets in the kitchen, you no longer need any chemical treatment to clean your oven – just the push of a button. For even more convenience, pyrolytic iQ700 studioLine ovens feature pyrolysis proof rails, eliminating the hassle of having to remove interior fittings and wash them by hand.



ecoClean®: Siemens patented coating.

Ovens with ecoClean® use a specially designed ceramic coating on the oven interior designed to absorb waste deposits. The oven notifies you when a cleaning program needs to be run, cleaning the lining by causing the absorbed waste to be oxidised. The next time the oven is used, oxygen is restored to the coating, leaving it rejuvenated and ready to absorb waste.



Full control at every step.

Using an oven should be simple, intuitive and yield precisely the desired result. Thanks to a clear menu structure and satisfyingly simple navigation, Siemens ovens make it easy to select the perfect settings and perform cleaning functions.



It has never been this easy to navigate an oven, with bigger size, brighter colours, and useful information that anticipates your needs at the precise moment. Thanks to a menu structure which is simple to navigate, the iQ700 studioLine TFT-Touchdisplay Plus sets a new standard in usability to give you total control.



The TFT-Touchdisplay allows you to operate the oven and choose its unique features with ease – thanks to the combination of the bright colour display, touch navigation and intuitive menu structure.



The TFT-Display with clearText makes it easy to read information from every angle. The intuitive menu guidance allows you to control oven functions in just a few simple steps.

iQ700 studioLine ovens

studioLine



Home Connect

iQ700 studioLine ecoClean® oven with fullSteam


studioLine



Home Connect

iQ700 studioLine pyrolytic oven with microwave and pulseSteam

studioLine

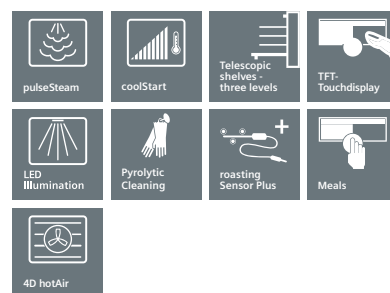

Home Connect

iQ700 studioLine pyrolytic oven with pulseSteam

Model	HS858GXB6B	HN878G4B6B	HR876G8B6A
Features	71 litre cavity size 15 heating functions 4 additional functions fullSteam pulseSteam roastingSensor Plus bakingSensor Sous-vide 5 shelf positions 3 telescopic rails ecoClean® (rear, side, ceiling)	67 litre cavity size 15 heating functions 5 additional functions pulseSteam roastingSensor Plus bakingSensor 800W inverter microwave 5 shelf positions 1 pyrolysis proof telescopic rail	71 litre cavity size 13 heating functions 4 additional functions pulseSteam roastingSensor Plus 5 shelf positions 3 pyrolysis proof telescopic rails
Supplied accessories	1 wire rack 1 universal pan 3 steam containers 1 sponge	2 wire racks 1 universal pan	2 wire racks 1 universal pan 1 pyrolysis proof grill tray
Dimensions (HxWxD)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm


studioLine



Home Connect


iQ700 studioLine pyrolytic oven with microwave

studioLine

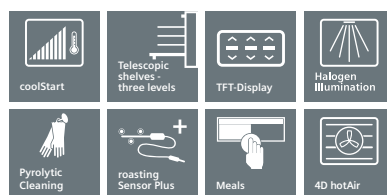

iQ700 studioLine pyrolytic oven

studioLine

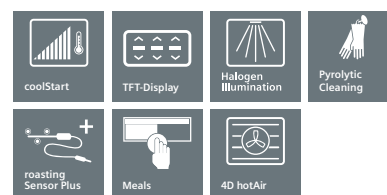

iQ700 studioLine pyrolytic oven

Model	HM876G2B6A	HB875G8B1A	HB875GDB1A
Features	67 litre cavity size 15 heating functions 4 additional functions roastingSensor Plus 800W inverter microwave 5 shelf positions 1 pyrolysis proof telescopic rail	71 litre cavity size 13 heating functions 2 additional functions roastingSensor Plus 5 shelf positions 3 pyrolysis proof telescopic rails	71 litre cavity size 13 heating functions 2 additional functions roastingSensor Plus 5 shelf positions
Supplied accessories	2 wire racks 1 universal pan 1 pyrolysis proof grill tray	2 wire rack 1 universal pan 1 pyrolysis proof grill tray	2 wire racks 1 universal pan 1 pyrolysis proof grill tray
Dimensions (HxWxD)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm

iQ700 studioLine compact ovens

studioLine



Home Connect

iQ700 studioLine compact
ecoClean® oven with fullSteam


studioLine



Home Connect

iQ700 studioLine compact
ecoClean® oven with microwave

studioLine

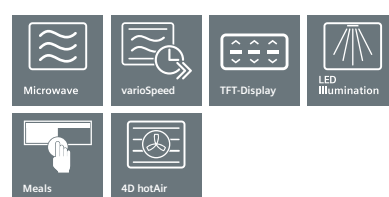

iQ700 studioLine compact
oven with microwave

Model	CS858GRB7B	CM836GPB6A	CM833GBB1A
Features	47 litre cavity size 15 heating functions 4 additional functions roastingSensor Plus fullSteam pulseSteam bakingSensor Sous-vide 3 shelf positions 1 telescopic rail ecoClean® (rear, side, ceiling)	45 litre cavity size 13 heating functions 4 additional functions roastingSensor Plus 900W inverter microwave 3 shelf positions 1 telescopic rail ecoClean® (rear)	45 litre cavity size 6 heating functions 3 additional functions 900W inverter microwave 3 shelf positions
Supplied accessories	1 wire rack 1 universal pan 3 steam containers 1 sponge 1 pizza pan	1 wire rack 1 universal pan	1 wire rack 1 universal pan
Dimensions (HxWxD)	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm

Oven accessories



HZ636000
Glass pan

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, HS858GXB6B, CS858GRB7B, HR876G8B6A, CM836GPB6A, CM833GBB1A



HZ632070
Multi-purpose enamelled pan (pyrolysis proof)

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, HS858GXB6B, CS858GRB7B, HR876G8B6A, CM836GPB6A, CM833GBB1A



HZ631070
Enamelled baking tray (pyrolysis proof)

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, HS858GXB6B, CS858GRB7B, HR876G8B6A, CM836GPB6A, CM833GBB1A



HZ633070
Enamelled professional pan with wire rack (pyrolysis proof)

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, HS858GXB6B, HR876G8B6A



HZ633001
Lid for professional pan

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HS858GXB6B, HR876G8B6A



HZ638300
3 level telescopic shelf rail, full extension


For model
HB875GDB1A



HZ634000
Baking and roasting wire rack (standard)

For models

HB875GDB1A, HB875G8B1A, HR876G8B6A



HZ634080
Baking and roasting wire rack (suitable for microwave cooking)

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, CM836GPB6A, CM833GBB1A



HZ664000
Baking and roasting wire rack (suitable for steam cooking)

For models

HS858GXB6B, CS858GRB7B



HZ617000
Enamelled pizza tray

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, HS858GXB6B, CS858GRB7B, HR876G8B6A, CM836GPB6A



HZ625071
Split grill tray (pyrolysis proof)

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, HS858GXB6B, CS858GRB7B, HR876G8B6A, CM836GPB6A, CM833GBB1A



HZ327000
Pizza baking stone and paddle

For models

HN878G4B6B, HB875GDB1A, HB875G8B1A, HM876G2B6A, HS858GXB6B, CS858GRB7B, HR876G8B6A, CM836GPB6A, CM833GBB1A

*Please check availability of any accessory with your retailer

Companion appliances



Coffee Centre

The finishing touch for your kitchen or dining area, the Siemens coffee machine is the ultimate appliance for coffee lovers and those who like to entertain. The central control dial and TFT full colour display with interactive menu continues the iQ700 studioLine design story, whilst innovations in grinding, extraction brewing temperatures and cleaning make for a seamless, personalised coffee experience.

Warming drawer

With an adjustable temperature range of 40°C to 80°C, a Siemens warming drawer can warm dinnerware, or keep food hot for up to one hour, safely and hygienically. Not only that, but you can use your Siemens warming drawer to prove dough, gently thaw delicate items, to warm food, and even gently slow cook. Holding up to 25kg, it's a must have for the complete kitchen.

Vacuum drawer

The Siemens vacuum drawer is perfect for preparing food for cooking in a Siemens oven with the Sous-vide function, or for conserving food for longer. Food is vacuum-sealed in the 99% airtight drawer with three vacuum levels, for best results in achieving succulent dishes, preserving aroma, or preparing food portions. The safety glass cover provides safe vacuuming even under high pressure.




Coffee machine

Warming drawer

Vacuum drawer

studioLine

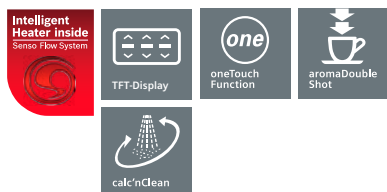

Home Connect

iQ700 studioLine built-in coffee machine

Model	CT836LEB6
Functions	sensoFlow System: Ideal and consistent brewing temperature aromaPressure System: Optimal aroma extraction aromaDouble Shot: Extra-strong coffee with less bitterness thanks to two grinding and brewing processes
Convenience	myCoffee: Save 6 unique beverages with individual names oneTouch DoubleCup: Prepare two cups simultaneously for all coffee and milk specialities
Performance	silentCeram Drive: Quiet premium grinder made from non-wearing ceramic coffeeSensor System: The grinding unit automatically adjusts to the bean variety
Cleaning	Removable brewing unit: Easy and hygienic cleaning under running water calc'nClean: Automatic cleaning and descaling program
Dimensions (HxWxD)	455 x 594 x 385mm

studioLine



iQ700 studioLine 140mm warming drawer

Model	BI830CNB1A
Features	40°C - 80°C temperature control with 4 levels 20 litre capacity Push & pull opening Telescopic drawer coolGlass front
Suitable for	Slow cooking Proving yeast dough Defrosting Keeping food warm Pre-warming cups, plates and ovenware
Supplied accessories	
Dimensions (HxWxD)	140 x 594 x 548mm

studioLine



iQ700 studioLine 140mm vacuum drawer

Model	BV830ENB1
Features	3 vacuuming levels (80%, 95%, 99%) 8 litre capacity Push & pull opening Telescopic drawer
Suitable for	Sous-vide preparation Marinating Preserving Food portioning
Supplied accessories	1 adaptor 2 vacuuming bags 1 vacuuming hose
Dimensions (HxWxD)	140 x 595 x 542mm

Induction Cooktops



Fast and flexible.



Flexible cooking zones for creative cooking.

Siemens flexInduction® cooktops can behave as traditional induction cooktops with three or more separate zones. But choose to link the zones together to form one or more rectangular surfaces, and the real magic begins. The extended cooking surface can accommodate pans of any size, and even several pans placed anywhere on the surface at the same time. And of course flexInduction® has all the advantages of induction cooking, including boost settings, pan recognition, and a power output of up to 3.7kW.



Faster and safer frying.

The new power level for quickly and safely heating pans. panBoost applies extremely high heat to your pan for 30 seconds and then automatically resets the cooking zone to Level 9.




Heat water faster.

potBoost heats your pot of water by applying up to 50% higher heat for 10 minutes and then automatically resetting the cooking zone to Level 9.



flexInduction® Plus.

Ideal for larger pots and pans, flexInduction® Plus allows large cookware to be positioned horizontally, to achieve full surface contact. It also leaves more room for additional pots and pans towards the front of the cooktop.



powerMove Pro.

Divide your flexInduction® cooktop into 5 heating zones with different temperatures. Just lift your cookware to the right spot to activate the zone.



Follow your cookware wherever it goes.

Any time you choose to re-arrange a piece of cookware, the induction surface detects this and reacts immediately. This means you can move your pots and pans around without losing any of the settings you've associated with each pan. The power at the pot's previous location is automatically switched off.



Cooktops one step ahead.


When you turn on the cooktop, the quickStart function automatically identifies and selects the cooking area on which you have placed the pot. All you have to do is adjust the temperature setting, and you're ready to go.

Smart automation.



No more scorching: frySensor Plus.

For a controlled frying temperature, simply choose from a range of automatic programs according to the type of food being cooked, and frySensor Plus will apply the ideal setting. A signal tone will let you know when the ideal frying temperature has been reached.



Automatic safety switch-off.

Built-in sensors identify when the cooktop is no longer in use, and will automatically shut it down, so there's no need to worry if you've forgotten to turn it off.



Control your rangehood via your cooktop.

The cookConnect function allows your cooktop and rangehood to communicate with one another and act as one unit. Various functions of your Siemens rangehood can be operated directly via the cooktop.*



*cookConnect is compatible with the LC918UV50A rangehood.



Induction cooktops





90cm flexInduction® cooktop

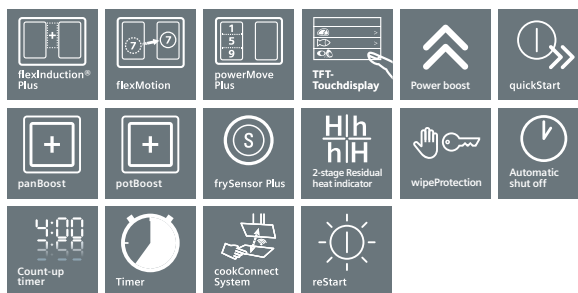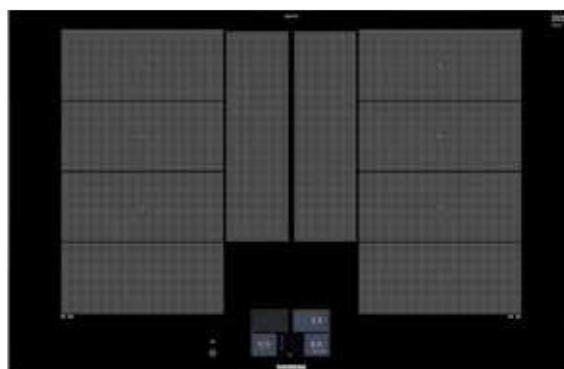



 Home Connect

80cm flexInduction® Plus cooktop

Model	EX975LVC1E	EX875KYW1E
Features	5 cooking zones including 4 zones convertible to 2 x flexZones 1 triple circuit zone 17 power settings with powerBoost LED display with dual lightSlider controls Child lock	4 cooking zones convertible to 2 x flexZones and 2 x extended flexZones 17 power settings with powerBoost TFT-Touchdisplay and controls Automatic meals programs Child lock
Design	Black ceramic glass with faceted front, stainless steel side profiles	Black ceramic glass with faceted front, stainless steel side profiles
Dimensions (WxD)	912 x 520mm	812 x 520mm

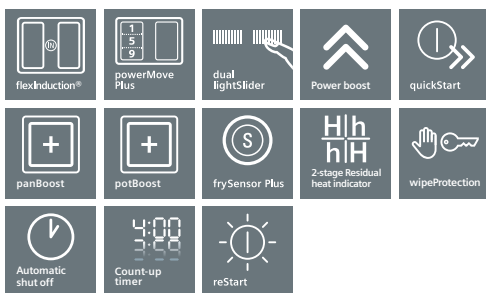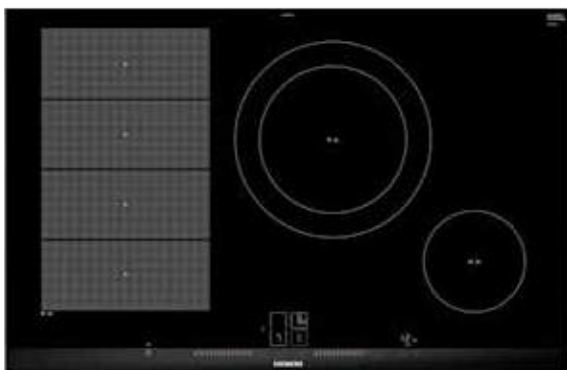



80cm flexInduction® cooktop

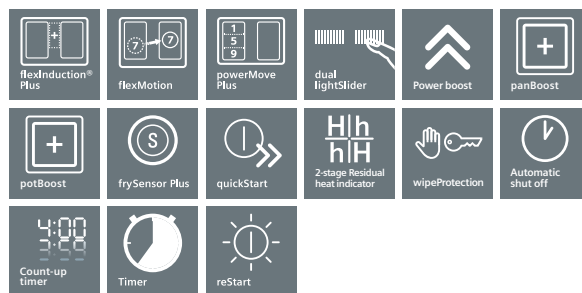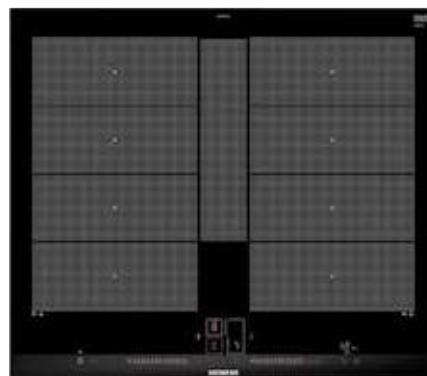

60cm flexInduction® Plus cooktop

Model	EX875LEC1E	EX675LYC1E
Features	4 cooking zones including 2 zones convertible to 1 x flexZone 1 double circuit zone 17 power settings with powerBoost LED display with dual lightSlider controls Child lock	4 cooking zones convertible to 2 x flexZones and 1 x extended flexZone 17 power settings with powerBoost LED display with dual lightSlider controls Child lock
Design	Black ceramic glass with faceted front, stainless steel side profiles	Black ceramic glass with faceted front, stainless steel side profiles
Dimensions (WxD)	812 x 520mm	602 x 520mm

Induction cooktops

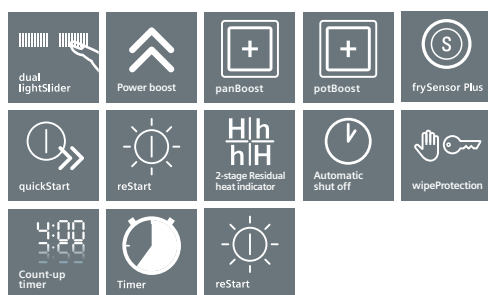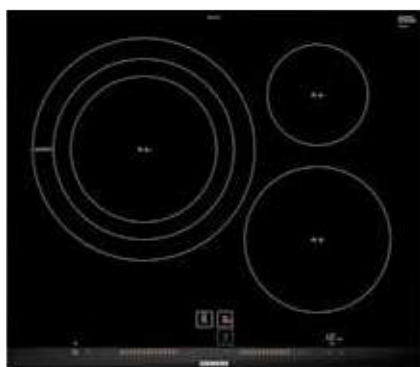

60cm induction cooktop

Model	EH675LDC1E
Features	3 cooking zones including 1 triple circuit zone 17 power settings with powerBoost LED display with dual lightSlider Child lock
Design	Black ceramic glass with faceted front, stainless steel side profiles
Dimensions (WxD)	602 x 520mm

Cooktop accessories



HZ390250

Fry pan for induction/ceramic cooktops with frySensor Plus – Large 28cm ø

For models

EX975LVC1E, EX675LYC1E, EH675LDC1E, EX875KYW1E, EX875LX34E, EX875LEC1E



HZ390042

4 piece induction cookware set consisting of 2 pots, 1 casserole and 1 fry pan

For models

EX975LVC1E, EX675LYC1E, EH675LDC1E, EX875KYW1E, EX875LX34E, EX875LEC1E



HZ390090

Wok for induction and ceramic cooktops – stainless steel – Includes glass lid and draining grid

For models

EX975LVC1E, EX675LYC1E, EH675LDC1E, EX875KYW1E, EX875LX34E, EX875LEC1E



HZ390512

Large Teppanyaki plate for flexInduction®

For models

EX975LVC1E, EX675LYC1E, EH675LDC1E, EX875KYW1E, EX875LX34E, EX875LEC1E



HZ390522

Griddle plate for flexInduction®

For models

EX975LVC1E, EX675LYC1E, EH675LDC1E, EX875KYW1E, EX875LX34E, EX875LEC1E



HZ394301

Connection rail for the combination of domino cooktops

For models

ER3A6AD70A



HZ381501

Recirculation Kit

For model

EX875LX34E



HZ381401

Ducted Extraction Kit

For model

EX875LX34E



Induction with integrated ventilation

Enjoy more freedom in kitchen planning with the inductionAir system. This space-saving concept combines two extraordinary appliances: a flexInduction cooktop and revolutionary integrated downdraft ventilation. The design of the inductionAir system reflects an understanding of the latest kitchen concepts: cooking surfaces and ventilation merge to remove the need for an overhead rangehood, whilst still maintaining space below for storage.



Flexible cooking zones for flexible cooking.

The Siemens inductionAir cooktop retains all the freedom and flexibility of a standard flexInduction® cooktop. The extended cooking surface can accommodate pans of any size, and even several pans placed anywhere on the surface at the same time. And of course flexInduction® has all the advantages of induction cooking, including boost settings, pan recognition, and a power output of up to 3.7kW.



Dishwasher-proof pan support and filters.

The inductionAir cooktop comes equipped with a grease filter, 200ml liquid collection unit and an additional 2L liquid collection unit, preventing spills or general cooking mess from entering the extraction unit. Cleaning the cooktop is quick and simple with the cast iron air inlet grid, grease filter, and liquid collection units all easy to remove and dishwasher safe.



Intuitive control: powerMove Plus.



Divide your flexInduction® cooktop into 3 heating zones with different temperatures. Just lift your cookware to the right spot to activate the zone. Fry at the front of your cooktop and warm at the back.



climateControl Sensor

No need to adjust or regulate the extraction power level. An intelligent sensor detects the level of steam and odours rising from the cooking and automatically adjusts the extraction power level, for more effective and efficient extraction.

Induction with integrated ventilation

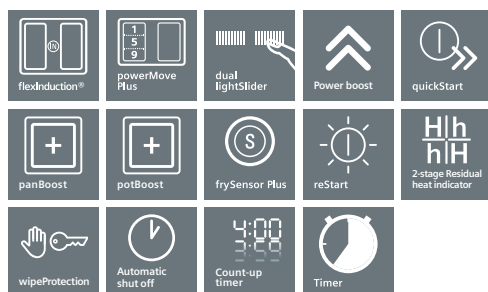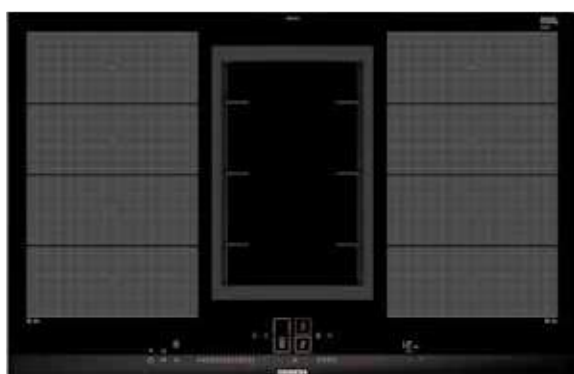

80cm inductionAir flexInduction® cooktop

Model	EX875LX34E
Features	4 cooking zones convertible to 2 x flexZones 17 power settings with powerBoost LED display with dual lightSlider controls Child lock
Ventilation	698m³/h maximum extraction rate 9 power levels + intensive setting with auto-reset 42 / 75dB (min / intensive)
Design	Black ceramic glass with faceted front, stainless steel side profiles
Installation	One of the ventilation solutions (right) must be installed with the product (accessory sold separately)
Dimensions (WxD)	812 x 520mm



HZ381501
Recirculation Kit

Includes:

- 3 horizontal depth adapters (40mm, 80mm, 120mm) for different worktop depths from 600-750mm
- 90° upper diverter element
- Flexible telescopic element (for additional height, depth and lateral adjustability)
- 4 height adapter elements (50mm each)
- cleanAir high performance odour filter
- Lower 90° diverter with air outlet (180° reversible)
- Adaptive air diffuser element
- Bracket for fixation onto bottom panel of furniture



HZ381401
Ducted Extraction Kit

Includes:

- 3 horizontal depth adapters (40mm, 80mm, 120mm) for different worktop depths from 600-750mm
- 90° diverter element
- Connector element for continuation with 220 x 90mm flat ducting

Flexible installation options.

The Siemens inductionAir system allows for either ducted or recirculating ventilation, depending on which extraction kit is chosen. A ducted extraction kit is recommended if there is the opportunity to discharge the odours directly outside. If this is not possible, the recirculation kit provides a solution that nullifies the cooking odours before recirculating the air back into the kitchen. Both the ducting and recirculation kits allow for under bench cupboard space to be retained, leaving space for drawers or shelves to be installed.



Ducted system

If there's an opening in the wall behind the extractor unit, the ducting kit can be connected directly. If direct ducting is not an option, the ducting kit contains a 90° adapter that allows extended, customized ductwork to be installed as needed.



Recirculation system

The recirculation kit cleans the air with the help of an active carbon filter. When installing the recirculation kit ensure you have access to the ventilation filter, for example via an open cupboard or removable drawers.

The active carbon filter section of the recirculation kit is reversible and can be installed to provide access to the filter from either the front or the rear to suit the island bench configuration.



Typical Bench

Countertop depth: 600mm

- The recirculation kit is installed partly inside the lower cabinet.
- Shelves or shelf rails in the lower cabinet may need to be shortened.



Extra Deep Bench

Countertop depth: 750mm

- The recirculation kit is behind the lower cabinet.
- Shelves and shelf rails in the lower cabinet may retain their full depth.



Island Bench

Countertop depth: Variable

- The recirculation kit is installed between the cabinets.
- Depending on the countertop depth on the overall installation, the shelves or shelf rails used in the lower cabinet may need to be shortened.



stepFlame: 9 steps of precise flame control.



With the ground-breaking technology of stepFlame®, the first time you find the ideal setting for your dish is the last time you'll need to think about it. stepFlame® technology allows you to select from nine different flame levels to precisely adjust the flame height, giving you consistent and repeatable results every time.



Flame level 9



Flame level 7

Gas cooktops



Powerful wok cooking.

Siemens gas cooktops now feature wok burners delivering up to 22MJ/h of power. For superior precision and flexibility, our wok burners offer dual control, which allows you to independently adjust the inner and outer flame rings from the same control dial.



2-stage residual heat indicators.

After a pan is removed, residual heat will remain for a short period. The LED display will show 'H' when residual heat is suitable for finishing off cooking or keeping food warm. A 'h' indicates residual heat is insufficient to cook, but hot enough to evoke caution.



Safety first.

Siemens gas cooktops are equipped with a flame failure safety device which cuts off the gas supply to an individual burner, should the flame be accidentally extinguished.



LED Display.

The black glass model features an LED display which clearly shows the selected flame level. Once switched off, the residual heat indicator is displayed instead.





Making cleaning simpler.

Save time on cleaning by placing your dishwasher-safe pan supports in the dishwasher, giving you more time for the things you enjoy.




Flame level 3

stepFlame[®] gas cooktops

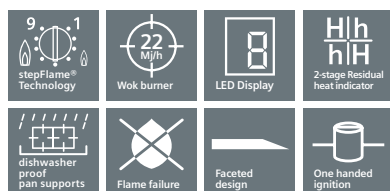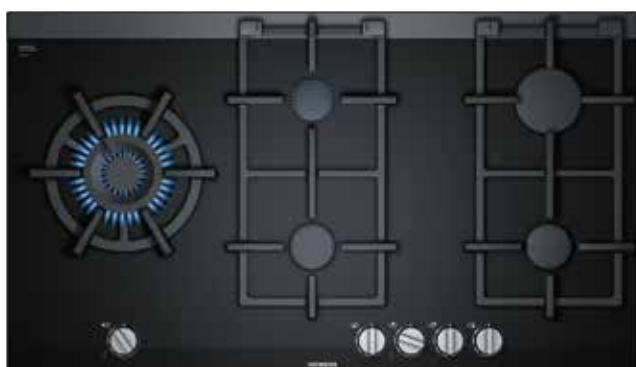

90cm stepFlame[®] gas cooktop



90cm stepFlame[®] gas cooktop

Model	ER9A6SD70A	EC9A5SB90A
Features	5 burners: 1 x 22MJ/h dual flame wok burner, 1 x high-speed burner, 2 x standard burners, 1 x economy burner	5 burners: 1 x 19.5MJ/h dual flame wok burner, 1 x high-speed burner, 2 x standard burners, 1 x economy burner
Design	Black ceramic glass with faceted front and rear, stainless steel side profiles Sword control knobs	Stainless steel Sword control knobs
Supplied accessories	Wok ring support Espresso cross support LPG conversion kit	Wok ring support Espresso cross support LPG conversion kit
Dimensions (WxD)	912 x 520mm	915 x 520mm



75cm stepFlame® gas cooktop

60cm stepFlame® gas cooktop

30cm wok stepFlame® gas cooktop

Model	EC7A5RB90A	EC6A5IB90A	ER3A6AD70A
Features	5 burners: 1 x 19.5MJ/h dual flame wok burner, 1 x high-speed burner, 2 x standard burners, 1 x economy burner	4 burners: 1 x 15MJ/h wok burner, 1 x high-speed burner, 1 x standard burners, 1 x economy burner	1 x 22MJ/h dual flame wok burner
Design	Stainless steel Sword control knobs	Stainless steel Sword control knobs	Black ceramic glass with faceted front, stainless steel side profiles Sword control knob
Supplied accessories	Wok ring support Espresso cross support LPG conversion kit	Wok ring support Espresso cross support LPG conversion kit	Wok ring support Espresso cross support LPG conversion kit
Dimensions (WxD)	750 x 520mm	582 x 520mm	302 x 520mm



Rangehoods

Eliminate grease, steam and odours effortlessly and quietly.



Powerful, efficient and quiet: iQdrive brushless motor.

Driving our rangehoods is the iQdrive: a high-performance magnetic motor that is the most economical, durable and fastest ever built by Siemens. The brushless mechanism enables it to remain cool – eliminating energy loss and faults typically caused by frictional heat – and also makes it remarkably quiet.



Let the rangehood decide.

No need to adjust or regulate power levels. An intelligent sensor automatically adjusts the rangehood power level to the steam and odours, for more effective and efficient extraction.



Auto run-on facility.

To ensure your cooking space is returned to its optimum environment, the automatic run-on facility works for an additional ten minutes to deal with any lingering cooking odours before switching itself off.



Three speeds. Then there's intensive.

All Siemens models feature three speed settings, with the addition of one to two intensive settings – perfect for high-extraction cooking such as stir-fries and BBQ Grill cooking.



Automatically reverts back.

Since the intensive setting is only required for a short time, the rangehood will automatically revert to a lower speed setting after a few minutes.




cookConnect System.

The cookConnect function allows the cooktop and rangehood to communicate with one another and act as one unit. Various functions of your Siemens rangehood can be operated directly via the cooktop.*

*cookConnect is compatible with the EX875KYW1E cooktop.


Rangehoods

Canopy rangehood

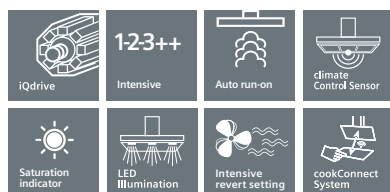

Home Connect

Integrated rangehoods

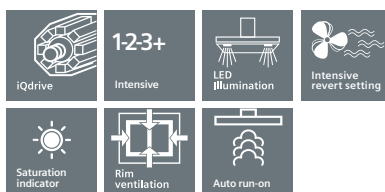


90cm wall-mounted canopy rangehood

86cm integrated rangehood

70cm integrated rangehood

Model	LC91BUV50A	LB89586AU	LB78574AU
Features	964m³/h maximum extraction rate 3 power levels + 2 intensive settings with auto-reset 3 x 3W LED softLights with dimmer Touch control Dishwasher safe filters 45 / 73dB (min / intensive)	800m³/h maximum extraction rate 3 power levels + intensive setting with auto-reset 2 x 1W LED illumination Push button controls Dishwasher safe filters 41 / 70dB (min / intensive)	730m³/h maximum extraction rate 3 power levels plus + intensive setting with auto-reset 2 x 1W LED illumination Push button controls Dishwasher safe filters 53 / 69dB (min / intensive)
Dimensions (HxWxD)	614-954 x 898 x 500mm (ducted) 614-1064 x 898 x 500mm (recirculated)	418 x 860 x 282mm (ducted / recirculated) 418 x 836 x 264mm (built-in)	418 x 700 x 282mm (ducted / recirculated) 418 x 676 x 264mm (built-in)

Slide-out rangehood

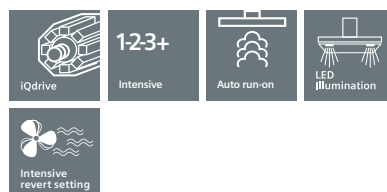

52cm integrated rangehood

60cm slide-out rangehood


Model	LB57574AU	LI675A530A
Features	610m³/h maximum extraction rate 3 power levels + intensive setting with auto-reset 2 x 1W LED illumination Push button controls Dishwasher safe filters 50 / 70dB (min / intensive)	740m³/h maximum extraction rate 3 power levels + 1 intensive settings with auto-reset 2 x 3W LED illumination Push button controls Dishwasher safe filters 42 / 68dB (min / intensive) Includes profile handle
Dimensions (HxWxD)	418 x 520 x 300mm (ducted / recirculated) 418 x 496 x 264mm (built-in)	426 x 598 x 290mm (ducted / recirculated) 385 x 524 x 290mm (built-in)

How to choose a rangehood.




Choosing a rangehood: The power to perform.

Your chosen rangehood must be powerful enough to effectively remove moisture and cooking odours from your kitchen. It is recommended that air be extracted (or exchanged) in a room - depending on your cooking - a minimum of 6 times per hour, and a maximum of 12 times per hour.

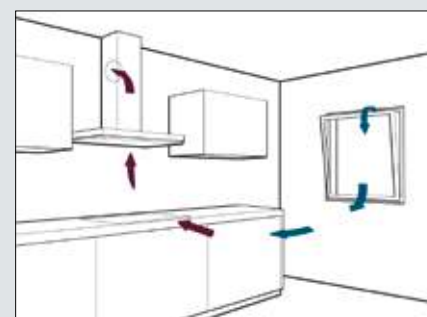

Ducted extraction.

Ducting out is the most effective method of extraction if the rangehood can be sited on an outside wall, or an outside wall can be reached via ducting. Our extractors are standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please see our installation guide for further advice on best practise installation.

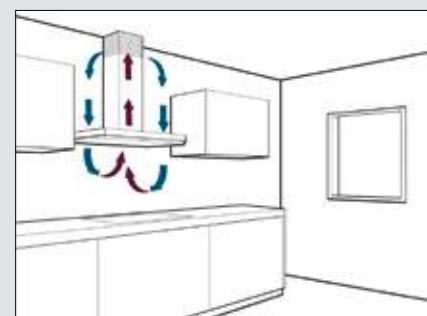


Recirculation kit.

Odours are extracted and filtered, then purified air is returned to the room. The Siemens cleanAir module comprises a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.




Dishwashers

The latest generation of Siemens dishwashers offer state-of-the-art technology in drying, efficiency, silence and flexibility. Finished with design lines to perfectly match your Siemens cooking suite, they come in three build types to suit your unique kitchen style.

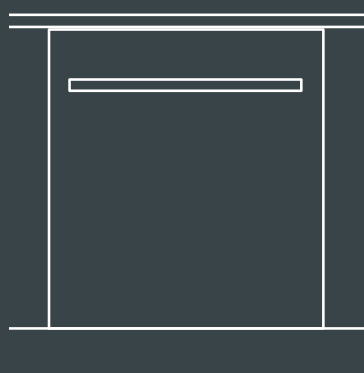


Fully integrated

Completely concealed behind your cabinetry of choice, the controls are revealed when you open the dishwasher door.

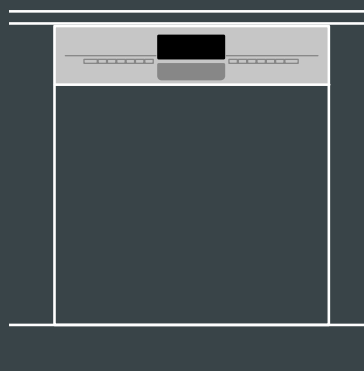

Semi-integrated

For the best of both worlds, the top display fascia is presented, while your bespoke cabinetry conceals the body.

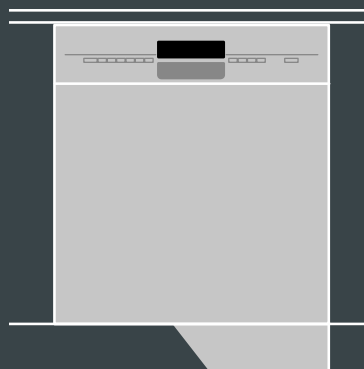

Built-under

Designed for installation under a benchtop, and height adjustable with optional use of the included stainless steel kick panel.

Zeolith®: Super-efficient drying technology.



The amazing properties of Zeolite.


Zeolith® uses the natural mineral of Zeolite, which has the astonishing ability to absorb moisture and convert it to heat. During the drying cycle, water evaporates off dishes and hot, wet air fills the cavity, which is drawn towards the Zeolite chamber. That's when these amazing little granules go to work. They absorb the surrounding humidity, and convert it to dry, hot air. Technology inside blows this hot air throughout the dishwasher cavity, providing an unprecedented drying force.



Shine & Dry: For gleaming glassware at the touch of a button.

Harnessing the power of Zeolith®, Shine & Dry is a special drying cycle that gently brings out a streak-free shine in the most delicate glassware and tableware. And it doesn't only benefit your glass and tableware, Shine & Dry also means extra dry, stain-free plastics, pots and pans.

When time is of the essence.



Perfect results, 50% faster.

Ever needed your dishes cleaned quickly, forgotten to put the dishwasher on in the morning, or simply needed clean plates before your guests arrive? varioSpeed is the perfect time saver, giving you the flexibility to speed up your wash so you can spend time on more important things.


Ideal when you need your cutlery and plates in a hurry, just press the varioSpeed button in conjunction with your desired program* to save up to 50% of wash time without any compromise on results.

*With the exception of Quick 45°C and Quick60 programs.



Quick60.

60 minute complete wash and dry cycle at 65°C, for dishes of variously soiled levels. Fast dishwashing results for today's fast paced lifestyle.



Clean dishes in under half an hour.

The ideal program when you have lightly soiled dishes, the Quick 45°C program cleans a half load in a dazzling 29 minutes*.

* With use of rinse aid

Maximum flexibility.




varioFlex Pro: State-of-the-art basket flexibility.

The varioFlex Pro upper and lower baskets feature unsurpassed flexibility to adapt to your dishwashing needs. The lower basket has been optimised to accommodate extra-large plates as well as pots and pans, whilst specially contoured arms on the upper basket are perfect for cradling delicate wine glass stems.



varioDrawer Pro: More than a cutlery drawer.

Adding a third shelf for cutlery, varioDrawer Pro removes the need for a cutlery basket, creating more space in the bottom basket. VarioDrawer Pro contains uniquely designed v-shape and drop-down sides that accommodate cutlery, as well as ladles, salad servers and small delicate items like espresso cups - providing greater flexibility when configuring the dishwasher load.



rackMatic Plus: Create more room above, or below.


rackMatic Plus allows you to effortlessly adjust the height of the top basket through three different levels to provide you with ultimate loading flexibility. You gain 2.5cm of height each time it is raised through its three stages. It can even be raised and lowered when it is fully loaded and angled to accommodate large plates and tall glassware. This provides you with greater flexibility when loading larger items into the dishwasher.



Coloured touchpoint guidance.


For fast and flexible loading at first glance, handy coloured touchpoints highlight adjustable elements across all levels in the dishwasher.

Convenient extras.



Fully integrated, fully informed.

With our dishwashers being so quiet, it can be hard to tell if they are on or off. To avoid opening the door mid-cycle, the innovative timeLight smartly projects the wash status onto the floor. Usable on any floor surface of any colour, you'll only need a quick glance to know where the wash cycle is at. Equally as innovative, infoLight projects a dot of light onto the floor so you can see instantly if the dishwasher is running.



Your dishes in the best light.

Creating a cool and clean ambience, emotionLight bathes your sparkling clean glassware in cool blue illumination when you open the door, and switches off again when you close it. The LED lights will last the lifetime of your dishwasher.



Make short work of long stems.

No longer will you choose to wash your wine glasses by hand. Available as an accessory to fit all full size Siemens dishwashers, the wine glass tray holds up to four long-stemmed wine glasses safely and securely. The innovative lock mechanism ensures your glasses are stable in the basket, yet with minimal contact areas to avoid any water pooling or streaks. The result? Sparkling glasses that have been safely cleaned and dried, every time.

Dishwashers

Fully integrated



iQ700 fully integrated
tallTub dishwasher



iQ500 fully integrated
dishwasher




Semi-integrated



iQ700 semi-integrated
tallTub dishwasher

Model	SX678X11TA	SN657X01MA	SX578S01TA
Features	15 place settings 5 star water efficiency 4.5 star energy efficiency TFT full colour display 8 wash programs superSilence 42dB	15 place settings 5 star water efficiency 4 star energy efficiency LED display 7 wash programs whisperQuiet 44dB	15 place settings 5 star water efficiency 4.5 star energy efficiency 2 x TFT full colour displays 8 wash programs superSilence 42dB
Supplied accessories	Cutlery basket	Cutlery basket	Cutlery basket
Dimensions (HxWxD)	865-925 x 598 x 550mm	815-875 x 598 x 550mm	865-925 x 598 x 573mm

Built-under

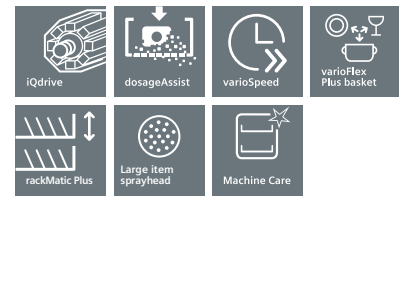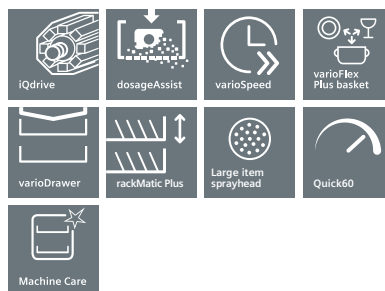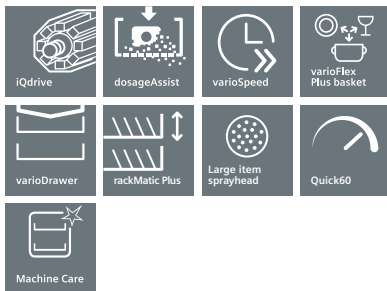

iQ500 semi-integrated
dishwasher

iQ500 built-under
dishwasher

iQ300 built-under
dishwasher

Model	SN557S01MA	SN457S01MA	SN436S01JA
Features	15 place settings 5 star water efficiency 4 star energy efficiency LED display 7 wash programs whisperQuiet 44dB	15 place settings 5 star water efficiency 4 star energy efficiency LED display 7 wash programs whisperQuiet 44dB	14 place settings 5 star water efficiency 4 star energy efficiency LED display 6 wash programs veryQuiet 46dB
Supplied accessories	Cutlery basket	Cutlery basket	Cutlery basket
Dimensions (HxWxD)	815-875 x 598 x 573mm	815-875 x 598 x 573mm	815-875 x 598 x 573mm



Cooling.

Behind the high-quality Siemens built-in refrigeration solutions, there is a premium concept in a form you've never seen before. With everything from innovative cooling technology and intelligent design solutions, the Siemens range is the perfect melding of performance, luxury and energy efficiency.



Overseas model shown.

Built-in cooling

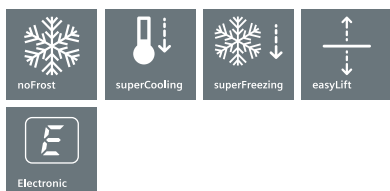

Built-in fridge freezer

Built-in single door fridge

Built-in single door freezer

Model	KI86NAD30A*	KI81RAD30A*	GI81NAC30A*
Features	273 litre gross volume 189 litre gross volume – fridge 84 litre gross volume – freezer 3 star energy rating Frost free cooling superFreezing & superCooling LED lighting easyLift door bins Electronic controls Acoustic open door warning system	321 litre gross volume 3 star energy rating hyperFresh premium helps food stay fresh for three times as long superCooling LED Lighting system easyLift door bins Electronic controls Acoustic open door warning system	235 litre gross volume 3 star energy rating Frost free cooling superFreezing LED Lighting system Electronic controls Acoustic open door warning system bigBox offers plenty of space to store and stack large frozen items
Supplied accessories	2 x cold packs 2 x egg trays 1 x ice cube tray	2 x egg trays	2 x cold packs 1 x ice cube tray
Dimensions (HxWxD)	1772 x 558 x 545mm	1772 x 558 x 545mm	1772 x 558 x 545mm

*New model - please check availability

Model		HS858GXB6B	HN878G4B6B	HR876G8B6A	HM876G2B6A
Type		iQ700 studioLine oven with full & pulseSteam	iQ700 studioLine pyrolytic oven with pulseSteam & microwave	iQ700 studioLine pyrolytic oven with pulseSteam	iQ700 studioLine pyrolytic oven with microwave
Dimensions	Appliance dimensions (HxWxD)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm
	Built-in dimensions (HxWxD)	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	355 x 480 x 415mm	357 x 480 x 392mm	357x 480 x 415mm	357 x 480 x 392mm
Capacity (litres)	Volume (usable litres)	71 litres	67 litres	71	67
	Water Tank (litres)	1 litre	1 litre	1 litre	
Heating methods	Number of heating functions	15	15	13	15
	4D hotAir	■	■	■	■
	Top/bottom heating	■	■	■	■
	Top/bottom heating eco	■	■	■	■
	hotAir eco	■	■	■	■
	Circulated air grilling	■	■	■	■
	Grill, large area	■	■	■	■
	Grill, small area	■	■	■	■
	Pizza setting	■	■	■	■
	Intensive heat	■	■	■	■
	Slow cook	■	■	■	■
	Bottom heating	■	■	■	■
	Drying	■	■	■	■
	Keep warm	■	■	■	■
	Plate warming	■	■	■	■
	coolStart	■	■	■	■
Additional functions	Number of additional functions	4	5	4	4
	Rapid heating	■	■	■	■
	Sabbath Mode	■	■	■	■
Additional heating functions: microwave	Microwave with inverter		90 / 180 / 360 / 600 / 800W		90 / 180 / 360 / 600 / 800W
	Combination microwave (varioSpeed): with 4D hotAir, Top/bottom heating, Hot air grilling, Grill		■	■	■
Additional heating functions: steam	fullSteam (100% Steam): for steam cooking, reheating, dough proving, defrosting, sous-vide	■ (5 functions)			
	Combination steam (pulseSteam): with 4D hotAir, Top/bottom heating, Hot air grilling, Keep warm, dough proving, reheating	■	■	■	
Sensor technology	bakingSensor	■	■		
	roastingSensor	■	■	■	■
	Meals (automatic programs)	■	■	■	■
Design elements	softMove door	■	■	■	■
	Display	5.7" TFT-Touchdisplay Plus	5.7" TFT-Touchdisplay Plus	3.7" TFT-Touchdisplay	3.7" TFT-Touchdisplay
	Interior illumination	Multilevel LED	Multilevel LED	LED	LED
	Telescopic Rails	3 levels	1 level (pyrolytic proof)	3 levels (pyrolytic proof)	1 (pyrolytic proof)
	No. shelf positions	5	5	5	5
	Removable door	■		■	
	Exterior surface	Black glass & stainless steel	Black glass & stainless steel	Black glass & stainless steel	Black glass & stainless steel
	Interior surface	Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel anthracite
	Actual temperature display	■	■	■	■
	Info button	■	■	■	■
User guidance	Water tank indicator	■	■	■	■
	Language options	29	29	29	29
	activeClean®		■	■	■
Cleaning	activeClean® rails		■	■	■
	ecoClean® self-cleaning function	■ (sides, rear, ceiling)			
	Drying function	■	■	■	
	Descaling	■	■	■	
Safety	Door	Triple Glazed	Quadruple glazed coolGlass door	Quadruple glazed coolGlass door	Quadruple glazed coolGlass door
	Child lock	■	■	■	■
	Residual heat indicator	■	■	■	■
	Automatic safety switch off	■	■	■	■
Technical requirements	Temperature range	30°C - 250°C	30°C - 300°C	30°C - 300°C	30°C - 300°C
	Total connected load	3.45kW	3.6kW	3.6kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied accessories	Wire rack	1	2		1
	Universal Pan	1	1	1	1
	Pyrolytic proof grill tray			1	1
	Steam container	3			
	Pizza pan				
Optional accessories	Sponge	1			
		Refer to page 15	Refer to page 15	Refer to page 15	Refer to page 15

HB875G8B1A iQ700 studioLine pyrolytic oven	HB875GDB1A iQ700 studioLine pyrolytic oven	CS858GRB7B iQ700 studioLine compact oven with full & pulseSteam	CM836GPB6A iQ700 studioLine compact oven with microwave	CM833GBB1A iQ700 studioLine compact oven with microwave
595 x 594 x 548mm	595 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm
585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm
357 x 480 x 415mm	357 x 480 x 415mm	235 x 480 x 415mm	237 x 480 x 392mm	237 x 480 x 392mm
71	71	47	45	45
		1 litre		
13	13	15	13	6
■	■	■	■	■
■	■	■	■	
■	■	■	■	
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
■	■	■	■	
■	■	■	■	
■	■	■	■	
■	■	■	■	
■	■	■	■	■
■	■	■	■	
2	2	4	4	3
■	■	■	■	■
■	■	■	■	
			90 / 180 / 360 / 600 / 900W	90 / 180 / 360 / 600 / 900W
			■	■
		■ (5 functions)		
		■		
		■		
■	■	■	■	
■	■	■	■	■
■	■	■	■	■
2.8" TFT Display	2.8" TFT Display	5.7" TFT-Touchdisplay Plus	3.7" TFT-Touchdisplay	2.8" TFT Display
Halogen	Halogen	LED	LED	LED
3 levels (pyrolytic proof)		1 level	1 level	
5	5	3	3	3
■	■	■		
Black glass & stainless steel	Black glass & stainless steel	Black glass & stainless steel	Black glass & stainless steel	Black glass & stainless steel
Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel anthracite
■	■	■	■	■
■	■	■	■	■
29	29	29	29	29
■	■			
■		■ (sides, rear, ceiling)	■ (rear)	
		■		
		■		
Quadruple glazed coolGlass door	Quadruple glazed coolGlass door	Triple Glazed	Triple Glazed	Triple Glazed
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
30°C - 300°C	30°C - 300°C	30°C - 250°C	30°C - 300°C	30°C - 275°C
3.6kW	3.6kW	3.3kW	3.6kW	3.65kW
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
1	1	1	1	1
1	1	1	1	1
1	1			
		3		
		1		
		1		
Refer to page 15	Refer to page 15	Refer to page 15	Refer to page 15	Refer to page 15

Coffee machine

Model		CT836LEB6
Type		iQ700 studioLine built-in coffee machine
Dimensions	Appliance dimensions (HxWxD)	455 x 594 x 385mm
	Built-in dimensions (HxWxD)	449 x 558 x 356mm
Design elements	Exterior surfaces	Black glass, stainless steel
Functions	sensoFlow System: Ideal and consistent brewing temperature	■
	aromaPressure System: Optimal aroma extraction	■
	One-touch preparation: Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffè Latte at the touch of a button	■
	aromaDouble Shot: Extra-strong coffee with less bitterness thanks to two grinding and brewing processes	■
	Individual temperature adjustment	Coffee (3 levels); hot water (4 levels)
	Including BRITA Intenza water filter: Reduces the lime content of water and filters substances affecting smell and taste	■
	TFT touchDisplay with interactive menu	■
	myCoffee: Save six favourite beverages with individual names and adjustable mixing ratio of milk and espresso	■
	individualCup Volume: Cup sizes adjustable individually, to ensure your cup gets filled just as far as you would like it to	■
	Height-adjustable coffee outlet and milk-frother	■
Comfort and convenience	oneTouch DoubleCup: Prepare two cups simultaneously for all coffee and milk specialities	■
	Removable water tank for easy refilling	■
	Early warning if water tank or bean container almost empty	■
	Flexible milk solution: Connect the provided milk container or any other container, eg. milk carton	■
	Easy user manual inside appliance	■
	silentCeram Drive: Quiet premium grinder made from non-wearing ceramic	■
	coffeeSensor System: The grinding unit automatically adjusts to bean variety	■
	Non-coffee preparations available	Warm milk; milk foam; hot water
	Reduced heat-up time: Fastest first cup	■
	Water pump pressure	19 bars
Performance	Separate chute for ground coffee, eg. caffeine-free coffee	■
	15,000 cup warranty: Consistently high appliance quality from the first cup to the 15,000th (valid for non-commercial use within 24 months)	■
	Removable brewing unit: Easy and hygienic cleaning under running water	■
	autoMilk Clean: Fully-automatic steam cleaning of the milk system after every beverage	■
	Milk frother removable and dishwasher safe	■
	singlePortion Cleaning: Complete emptying of all pipes after each brewing process	■
	Automatic rinsing program when switching off and switching on	■
	Drip tray and coffee grounds container removable and dishwasher safe	■
	calc'nClean: Automatic cleaning and descaling programme	■
	Water filter change, descaling, and cleaning reminder	■
Capacities	Water tank volume	2.4 litre
	Bean container	500g
	Milk container	0.5 litre
Safety	Child safety lock	■
Technical requirements	Electrical connection rating	1.6kW
	Current	10A
	Voltage	220-240V / 50-60Hz
Supplied accessories	Insulated milk container with freshLock lid, connection hose and pipe	1
	Measuring spoon	1
	Water hardness test strip	1
	Assembly screws	■
	Water filter cartridge	1

Warming drawer

Model		BI830CNB1A
Type		iQ700 studioLine 140mm warming drawer
Dimensions	Appliance dimensions (HxWxD)	140 x 594 x 548mm
	Built-in dimensions (HxWxD)	140 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	92 x 468 x 458mm
Heating methods	Heat levels	4 levels (high, low, medium, plate)
	Temperature control	■ 40°C - 80°C
	Suitable for	Slow cooking
		Proving yeast dough
		Defrosting
Comfort and convenience		Keeping food warm
		Pre-warming cups, plates and ovenware
	Telescopic drawer	■ (fully extendable)
	Capacity	20 litre
Design elements	Exterior surface	Black glass, push pull door
Safety	coolTouch front	■
	Door contact switch	■
Technical requirements	Max. weight load	25kg
	Total connected load	0.81kW
	Power requirements	220-240V / 50-60Hz

Vacuum drawer

Model		BV830ENB1
Type		iQ700 studioLine 140mm vacuum drawer
Dimensions	Appliance dimensions (HxWxD)	140 x 595 x 542mm
	Built-in dimensions (HxWxD)	141-142 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	95 x 350 x 285mm
	Max. size of vacuuming bags (WxL)	240 x 350mm
Vacuuming function	Vacuuming levels inside chamber	3 levels (80%, 95%, 99%)
	Vacuuming levels outside chamber	3 levels (50%, 75%, 90%)
	Drying program for vacuuming pump	■
	Automatic connection recognition for vacuuming outside the chamber	■
Comfort and convenience	Telescopic drawer	■ (fully extendable)
	Capacity	8 litre
Design elements	Display	Touch control
	Exterior surface	Black glass, push pull door
Safety	Door contact switch	■
Technical requirements	Max. weight load	10kg
	Total connected load	0.32kW
	Power requirements	220-240V / 50-60Hz
Accessories	Vacuuming bags	2
	Adaptor for vacuuming outside chamber	1
	Vacuuming hose	1

Induction cooktops

Model		EX975LVC1E	EX875KYW1E	EX875LEC1E
Type		90cm flexInduction® cooktop	80cm flexInduction® Cooktop	80cm flexInduction® Cooktop
Dimensions	Appliance dimensions (WxD)	912 x 520mm	812 x 520mm	812 x 520mm
	Built-in dimensions (HxWxD)	51 x 880 x 490-500mm	51 x 750-780 x 490-500mm	51 x 750-780 x 490-500mm
Design elements		Black ceramic glass with faceted front, stainless steel side profiles	Black ceramic glass with faceted front, stainless steel side profiles	Black ceramic glass with faceted front, stainless steel side profiles
Cooking zone configuration and (size)	Total cooking zones	5 cooking zones: 4 x zones convertible to 2 x flexZones, 1 x triple circuit zone	4 cooking zones: Convertible to 2 x flexZones + 2 x extended flexZones	4 cooking zones: 2 x zones convertible to 1 x flexZone, 2 x standard zones
	Front left	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 240mm)
	Rear left	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 240mm)
	Combined flexZone left	Combined flexZone: 3.3kW / 3.7kW with powerBoost (400 x 230mm)	Combined flexZone: 3.3kW / 3.7kW with powerBoost (400 x 230mm)	Combined flexZone: 3.3kW / 3.7kW with powerBoost (400 x 240mm)
	Middle	Triple Circuit zone: 2.2kW, 2.6kW, 3.3kW / 3.4kW, 3.6kW, 3.7kW with powerBoost (210 / 260 / 320mm)		Standard zone: 2.6kW / 3.7kW with powerBoost (280mm)
	Combined flexZone middle		2 auxiliary zones adapt the left or right cooking zones to different cookware and pots up to 300mm diameter	
	Front right	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	Standard zone: 1.4kW / 2.2kW with powerBoost (145mm)
	Rear right	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 230mm)	
	Combined flexZone right	Combined flexZone: 3.3kW / 3.7kW with powerBoost (400 x 230mm)	Combined flexZone: 3.3kW / 3.7kW with powerBoost (400 x 230mm)	
Performance	Power settings	17	17	17
	potBoost	■ (for all zones)	■ (for all zones)	■ (for all zones)
	panBoost	■	■	■
	flexInduction® Plus	■	■	■
	flexInduction	■	■	■
	powerMove Plus	■	■	■
	frySensor Plus (5 temperature settings)	■	■	■
	cookingSensor Plus		■ (ready)	
	Automatic pan recognition sensor	■	■	■
Comfort and convenience	TFT touch screen control		■	
	Dual lightSlider control	■		■
	Display	LED	5" Colour TFT	LED
	cookConnect		■	
	Meals (automatic programs)		■	
	quickStart	■	■	■
	reStart	■	■	■
	Timer with switch-off function for all zones	■	■	■
	Count up timer	■	■	■
	wipeProtection	■	■	■
Safety	Keep warm function	■	■	■
	Automatic safety switch off	■	■	■
	2 stage residual heat indicator	■	■	■
	Child lock	■	■	■
	powerManagement function	■	■	■
	Energy consumption display	■	■	■
	Buzzer	■	■	■
Technical requirements	Total connected load	11.1kW (49 amps)	7.4kW (33 amps)	7.4kW (33 amps)
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Minimum worktop thickness	30mm	30mm	30mm
Optional accessories		Refer to page 23	Refer to page 23	Refer to page 23

EX675LYC1E	EH675LDC1E
60cm flexInduction® cooktop	60cm frySensor Plus induction cooktop
602 x 520mm	602 x 520mm
51 x 560 x 490-500mm	51 x 560 x 490-500mm
Black ceramic glass with faceted front, stainless steel side profiles	Black ceramic glass with faceted front, stainless steel side profiles
4 cooking zones: Convertible to 2 x flexZones + 1 extended flexZone	3 cooking zones: 2 x standard zones, 1 x triple circuit zone
flexZone: 2.2kW / 3.7kW with powerBoost (190 x 225mm)	
flexZone: 2.2kW / 3.7kW with powerBoost (190 x 225mm)	Triple Circuit zone: 2.2kW, 2.6kW, 3.3kW / 3.7kW, 5.5kW with powerBoost (210 / 260 / 320mm)
Combined flexZone: 3.3kW / 3.7kW with powerBoost (380 x 225mm)	
Auxiliary zone adapts the left or right cooking zones to different cookware and pots up to 300mm diameter	
flexZone: 2.2kW / 3.7kW with powerBoost (190 x 225mm)	Standard zone: 2.2kW / 3.7kW with powerBoost (210mm)
flexZone: 2.2kW / 3.7kW with powerBoost (190 x 225mm)	Standard zone: 1.4kW / 2.2kW with powerBoost (145mm)
Combined flexZone: 3.3kW / 3.7kW with powerBoost (380 x 225mm)	
17	17
■ (for all zones)	■ (for all zones)
■	■
■	
■	
■	■
■	
■	■
■	
■	■
■	
LED	LED
■	■
■	■
■	■
■	■
■	■
■	■
■	■
■	■
■	■
■	■
7.4kW (33 amps)	7.4kW (33 amps)
220-240V / 50-60Hz	220-240V / 50-60Hz
30mm	30mm
Refer to page 23	Refer to page 23

inductionAir flexInduction® cooktop

Model		EX875LX34E
Type		80cm inductionAir flexInduction® cooktop
Dimensions	Appliance dimensions (WxD)	812 x 520mm
	Built-in dimensions (HxWxD)	198 x 780 x 490mm
Design elements		Black ceramic glass with faceted front, stainless steel side profiles
Cooking zone configuration and (size)	Total cooking zones	4 cooking zones convertible to 2 x flexZones
	Front left	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 240mm)
	Rear left	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 240mm)
	Combined flexZone left	Combined flexZone: 3.3kW / 3.7kW with powerBoost (400 x 240mm)
	Front right	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 240mm)
	Rear right	flexZone: 2.2kW / 3.7kW with powerBoost (200 x 240mm)
	Combined flexZone right	Combined flexZone: 3.3kW / 3.7kW with powerBoost (400 x 240mm)
Performance	Power settings	17
	potBoost	■ (for all zones)
	panBoost	■
	Flex connect	■
	flexInduction® Plus	
	powerMove Plus	■
	frySensor Plus	■ (5 temperature settings)
	cookingSensor Plus	■
	Automatic pan recognition sensor	■
Comfort and convenience	TFT touch screen control	
	Dual lightSlider control	■
	touchSlider control	
	Display	LED
	Meals (automatic programs)	
	quickStart	■
	reStart	■
	Timer with switch-off function for all zones	■
	Count up timer	■
	wipeProtection	■
	Keep warm function	■
Safety	Automatic safety switch off	■
	Residual heat indicator	■
	Child lock	■
	powerManagement function	■
	Energy consumption display	■
	Buzzer	■
Extraction rate according to EN 61591 (Ducted)	Maximum normal use	551m³/h
	Intensive	698m³/h
Extraction rate according to EN 61591 (Recirculation)	Maximum normal use	557m³/h
	Intensive	630m³/h
Ventilation Performance	Suitable for ducted or re-circulated extraction (Accessory is respectively required)	■
	Ducted extraction installation kit	HZ381401
	Recirculation extraction installation kit	HZ381501
	Power levels	9
	Intensive settings	1
	Automatic revert setting, 6 minutes	■
	iQdrive brushless motor	■
	Average energy consumption	53.5 kWh / year
	Auto run-on (30 mins)	■
	Climate control sensor	■
Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air	Noise levels (min/max)	42/69dB
	Intensive	75dB
Cleaning	Saturation indicator	■ (grease filter & clean air odour filter)
	Dishwasher safe 12 layer stainless steel grease filters	■
	Dishwasher safe cast-iron filter cover	■
	200ml dishwasher safe liquid collector unit	■
	2000ml dishwasher safe liquid spillover safety tank	■
Technical requirements	Total connected load	7.4kW (33 amps)
	Power requirements	220-240V / 50-60Hz
	Minimum worktop thickness	20mm
Optional accessories		Refer to page 23

Required installation accessories (separately available)		
Model	HZ381401	HZ381501
Type	Ducted extraction kit	Recirculation extraction kit
	Direct air outlet onto 220 x 90mm flat duct system or with 90° diverter element and outlet for continuation of ducting with 220 x 90mm flat duct.	Optimised for quick and flexible installation in all common furnitures (Minimum plinth height: 100mm).
Includes	3 mountable depth adapters (40mm, 80mm, 120mm) for different worktop depths from 600mm to 750mm	3 horizontal adapter elements (40mm, 80mm, 120mm) for worktop depths from 600mm to 750mm
	90° diverter element	Upper 90° diverter element
	Connector element for continuation with 220 x 90mm flat ducting	Flexible telescopic element (for additional height, depth and lateral adjustability)
		4 height adapter elements (50mm each) for furniture corpus heights from 675mm to 900mm
		Housing element for cleanAir filter drawer cassette (optionally 180° reversible)
		cleanAir high performance odour filters
		Lower 90° diverter with air outlet (optionally 180° reversible)
		Adaptive air diffuser element
		Element for fixation onto bottom panel of furniture.
		The cleanAir high performance odour filter is specifically optimised for all cooking applications and has an odour reduction rate of 85% and a lifetime of approximately 1 year.

Gas cooktops

Model		ER9A6SD70A	EC9A5SB90A
Type		90cm stepFlame® gas cooktop	90cm stepFlame® gas cooktop
Dimensions	Appliance dimensions (WxD)	912 x 520mm	915 x 520mm
	Built-in dimensions (HxWxD)	45 x 850-852 x 490-502mm	45 x 850-852 x 490-502mm
Design elements		Black ceramic glass with faceted front and rear, stainless steel side profiles. Sword knob controls	Stainless steel surface gas cooktop with dual wok burner, dual flame system, and cast iron pan supports. Sword knob controls
Cooking zones and output	Total cooking zones	5	5
	Front left	22MJ/h dual flame wok burner	19.5MJ/h dual flame wok burner
	Rear left		
	Front middle	8.1MJ/h standard burner	6.85MJ/h standard burner
	Rear middle	4.8MJ/h economy burner	4MJ/h economy burner
	Front right	8.1MJ/h standard burner	6.85MJ/h standard burner
Comfort and convenience	Rear right	11.6MJ/h high-speed burner	11MJ/h high-speed burner
	stepFlame® (1-9 steps precise heat control)	■	■
	Display	LED	
	One-hand electronic ignition	■	■
	Enamelled cast-iron pan support with non-scratch feet	■	■
	Dishwasher safe cast-iron pan supports	■	
Safety	Residual heat indicator	■	
	Flame failure safety device fitted to each burner	■	■
Supplied accessories	Wok ring support	■	■
	Espresso cross support	■	■
	LPG conversion kit	■	■
Technical requirements	Total connected gas load	54.6MJ/h	48.2MJ/h
	Pre-set to natural gas (10mbar)	■	■
	Power requirements	240V / 50Hz	240V / 50Hz
Optional accessories		Refer to page 23	Refer to page 23

EC7A5RB90A 75cm stepFlame® gas cooktop	EC6A5IB90A 60cm stepFlame® gas cooktop	ER3A6AD70A 30cm wok stepFlame® gas cooktop
750 x 520mm	582 x 520mm	302 x 520mm
45 x 560-562 x 480-492mm	45 x 560-562 x 480-492mm	45 x 270 x 490-500mm
Stainless steel surface gas cooktop with dual wok burner, dual flame system, and cast iron pan supports. Sword knob controls	Stainless steel surface gas cooktop with wok burner and cast iron pan supports. Sword knob controls	Black ceramic glass with faceted front and stainless steel side profiles. Sword knob controls. Can be combined with domino cooktops and selected cooktops.
5	4	1
4MJ/h economy burner	15MJ/h wok burner	
6.85MJ/h standard burner		
19.5MJ/h dual flame wok burner	4MJ/h economy burner	22MJ/h dual flame wok burner
6.85MJ/h standard burner	6.85MJ/h standard burner	
11MJ/h high-speed burner	11MJ/h high-speed burner	
■	■	■
		LED
■	■	■
■	■	■
		■
		■
■	■	■
■	■	■
■	■	■
■	■	■
48.2MJ/h	36.85MJ/h	22MJ/h
■	■	■
240V / 50Hz	240V / 50Hz	240V / 50Hz
Refer to page 23	Refer to page 23	Refer to page 23

Rangehoods

Model		LC91BUV50A	LB89586AU	LB78574AU	LB57574AU
Type		90cm wall-mounted canopy rangehood	86cm integrated rangehood	70cm integrated rangehood	52cm integrated rangehood
Dimensions	Appliance dimensions (HxWxD)		418 x 860 x 282mm	418 x 700 x 282mm	418 x 520 x 300mm
	Built-in Dimensions (HxWxD)		418 x 836 x 264mm	418 x 676 x 264mm	418 x 494 x 264mm
	Ducted air (HxWxD)	614-954 x 898 x 500mm			
	Recirculated (HxWxD)	614-1064 x 898 x 500mm			
Design elements		Stainless steel	Stainless steel	Stainless steel	Stainless steel
Extraction	Maximum extraction rate	964m³/h	800m³/h	730m³/h	610m³/h
	Power levels	3	3	3	3
	Intensive settings	2	1	1	1
	Automatic revert setting, 6 minutes	■	■	■	■
	iQdrive brushless motor	■	■	Twin motor	Twin motor
	Auto run-on (10 mins)	■			
	climateControl Sensor	■			
	Rim ventilation		■	■	■
Comfort and convenience	Noise levels	45-64dB (normal), 73dB (intensive)	41-64dB (normal), 71dB (intensive)	53-66dB (normal), 69dB (intensive)	50-67dB (normal), 70dB (intensive)
	Illumination	3 x 3W LED lights	2 x 1W LED lights	2 x 1W LED lights	2 x 1W LED lights
	softLight LED with dimmer function	■	■		■
	Display	LED			
	cookConnect	■			
	Electronic controls	■ (touch controls)	■ (push button controls)	■ (push button controls)	■ (push button controls)
	Sound insulation mats	■			
	Saturation indicator	■	■		
Cleaning	Dishwasher safe metal grease filters	■	■	■	■
	Stainless steel filter cover	■	■	■	■
Technical requirements	Total connected load	269W	270W	277W	252W
	Power requirements	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz
	Ducted tube connection diameter	150mm (120mm enclosed)	150mm (120mm enclosed)	150mm (120mm enclosed)	150mm (120mm enclosed)
Optional accessories	LZ53450 recirculation set	■			
	LZ55750 recirculation set		■	■	■
	LZ46800 CleanAir recirculation kit				
Included accessories					

LI67SA530A
60cm slide-out rangehood
426 x 598 x 290mm
385 x 524 x 290mm
Metallic silver
740m³/h
3
1
■
■
■
43-55dB (normal), 68dB (intensive)
2 x 3W LED Lights
■ (push button controls)
■
146W
220-240V / 50Hz
150mm (120mm enclosed)
■
Stainless steel profile panel

Dishwashers

Model		SX678X11TA	SN657X01MA	SX578S01TA	SN557S01MA	SN457S01MA
Type		iQ700 fully integrated tallTub dishwasher	iQ500 fully integrated dishwasher	iQ700 semi-integrated tallTub dishwasher	iQ500 semi-integrated dishwasher	iQ500 built-under dishwasher
Dimensions	Appliance dimensions (HxWxD)	865-925 x 598 x 550mm	815-875 x 598 x 550mm	865-925 x 598 x 573mm	815-875 x 598 x 573mm	815-875 x 598 x 573mm
Design	Interior tub material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Performance	Number of place settings	15	15	15	15	15
	Energy Rating (Economy 45°C)	4.5 star	4 star	4.5 star	4 star	4 star
	Energy consumption (kWh / year)	205	235	205	235	235
	Water Rating (Economy 45°C)	5 star	5 star	5 star	5 star	5 star
Wash programs	Water consumption (L / wash)	12	12	12	12	12
	Zeolith® Drying	■	■	■	■	■
	iQdrive brushless motor	■	■	■	■	■
	dosageAssist detergent system	■	■	■	■	■
	Number of Programs	8	7	8	7	7
	Auto 35-45°C	■	■	■	■	■
	Auto 45-65°C	■	■	■	■	■
	Auto 65-75°C	■	■	■	■	■
	Eco 45°C	■	■	■	■	■
	Glass Wash 40°C	■	■	■	■	■
	Quick Wash 60min (65°C)	■	■	■	■	■
	Quick Wash 29min* (45°C)	■	■	■	■	■
	Pre-Rinse	■	■	■	■	■
	Night Program 50°C (40dB)	■	■	■	■	■
Wash options	Pots and pans (70°C)	■	■	■	■	■
	Number of wash options	6	5	6	5	5
	varioSpeed	■	■	■	■	■
	halfLoad Plus	■	■	■	■	■
	intensiveZone	■	■	■	■	■
	hygienePlus	■	■	■	■	■
	Machine Care	■	■	■	■	■
	Extra dry	■	■	■	■	■
	Shine & Dry (Zeolith® drying)	■	■	■	■	■
Comfort and convenience	Noise level (dB)	superSilence 42dB	whisperQuiet 44dB	superSilence 42dB	whisperQuiet 44dB	whisperQuiet 44dB
	Display	Full colour TFT	LED	2 x Full colour TFT	LED	LED
	Time delay	■	■	■	■	■
	Controls	sensorTouch Buttons	sensorTouch Buttons	sensorTouch Buttons	sensorTouch Buttons	sensorTouch Buttons
	emotionLight internal lighting	■	■	■	■	■
activeWater Features	timeLight floor projection	■	■	■	■	■
	detergentAware	■	■	■	■	■
	loadSensor	■	■	■	■	■
	3 stage self-cleaning filter	■	■	■	■	■
Flexibility	hydroDry	■	■	■	■	■
	Coloured touchpoints	■	■	■	■	■
	Basket system	varioFlex Pro	varioFlex Plus	varioFlex Pro	varioFlex Plus	varioFlex Plus
	varioDrawer	Pro	■	Pro	■	■
	rackMatic Plus	■	■	■	■	■
Safety	Cutlery basket	■	■	■	■	■
	Large item sprayhead	■	■	■	■	■
	hydroSafe anti-flood protection	■	■	■	■	■
	Vapour barrier plate	■	■	■	■	■
Optional accessories		See below	See below	See below	See below	See below

* With use of rinse aid

Dishwasher accessories



SZ73300
Wine glass tray

For models
All models



SZ72010
hydroSafe hose extension

For models
All models



SZ73100
Cutlery basket

For models
All models

SN436S01JA
iQ300 built-under dishwasher
815-875 x 598 x 573mm
Stainless steel
14
4 star
220
5 star
11
■
■
6
■
■
■
■
■
■
■
4
■
■
■
■
veryQuiet 46dB
LED
■
Buttons
■
■
■
■
varioFlex Plus
■
■
■
■
■
■
■
See below

Built-in refrigeration

Model		KI86NAD30A*	KI81RAD30A*
Type		Built-in fridge freezer	Built-in fridge
Dimensions	Appliance dimensions (HxWxD)	1772 x 558 x 545mm	1772 x 558 x 545mm
	Built-in dimensions (HxWxD)	1775 x 560 x 550mm	1775 x 560 x 550mm
Performance	Gross volume	273 litre	321 litre
	Energy rating	3 star	3 star
	superCooling function	■	■
	superFreezing function	■	
	airFresh filter		■
	freshProtect big box	■	
	Freezing capacity	84 litre	
Controls	Electronic temperature control	■	■
	Digital 7 segment	■	■
Comfort and convenience	LED lighting	■	■
	Audible door alarm	■	■
	easyAccess glass shelves	■	■
	noFrost Freezer	■	
Shelving and compartments		5 x shelves (3 safety glass)	7 x safety glass shelves
		2 full extension storage trays	4 full extension storage trays
		Vegetable container with ribbed wavy bottom and humidity control	25l hyperFresh plus humidity container with automatic humidity control, wave bottom on fully extendable telescopic rails
		4 door shelves, 1 extra deep	4 door shelves, 1 extra deep
		Dairy compartment	Dairy compartment
	(Freezer)	3 transparent freezer drawers, including 1 big box	
Configuration	Reversible right-to-left hinged door	■	■
	Reversible left hinged door		
	Complete ventilation through plinth	■	■
	Variable plinth adaption	■	■
Technical requirements	Power requirements	220-240V	220-240V
	Climate class	SN-T	SN-T
Supplied accessories	Cold pack	2	
	Egg tray	2	2
	Ice cube tray	1	

*New model - please check availability


	GI81NAC30A*
	Built-in freezer
	1772 x 558 x 545mm
	1775 x 560 x 550mm
	235 litre
	3 star
	■
	■
	■
	■
	■
	■
	■
	■
	5 transparent freezer drawers, including 1 big box
	2 compartments with glass shelves with transparent hinges
	Ice cube tray
	■
	■
	■
	220-240V
	SN-T
	2
	1

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

iQ700 studioLine 60cm ovens with steam functions



Installation with a hob.

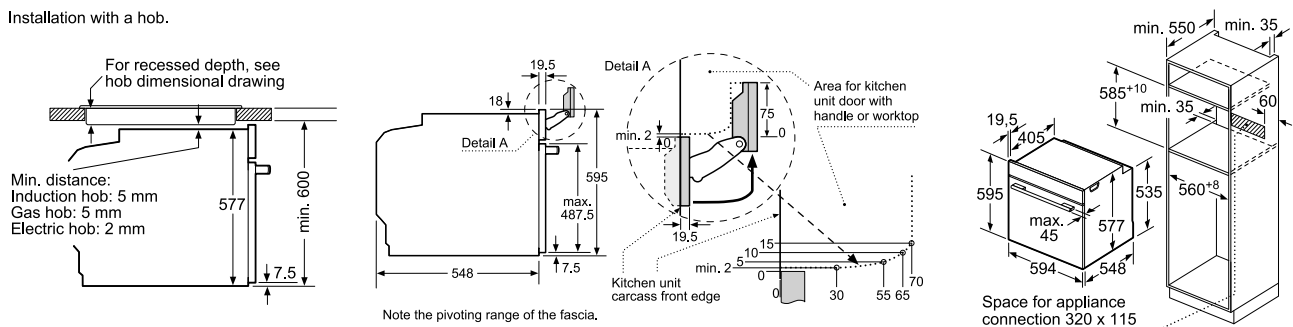

HS858GXB6B, HN878G4B6B, HR876G8B6A

Measurements in mm

iQ700 studioLine compact ovens with steam functions

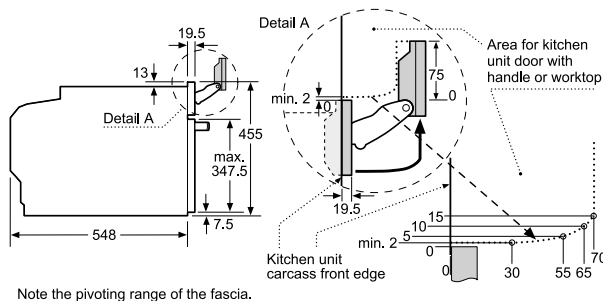


CS858GRB7B

Measurements in mm

iQ700 studioLine 60cm ovens with microwave / 60cm conventional ovens



Installation with a hob.

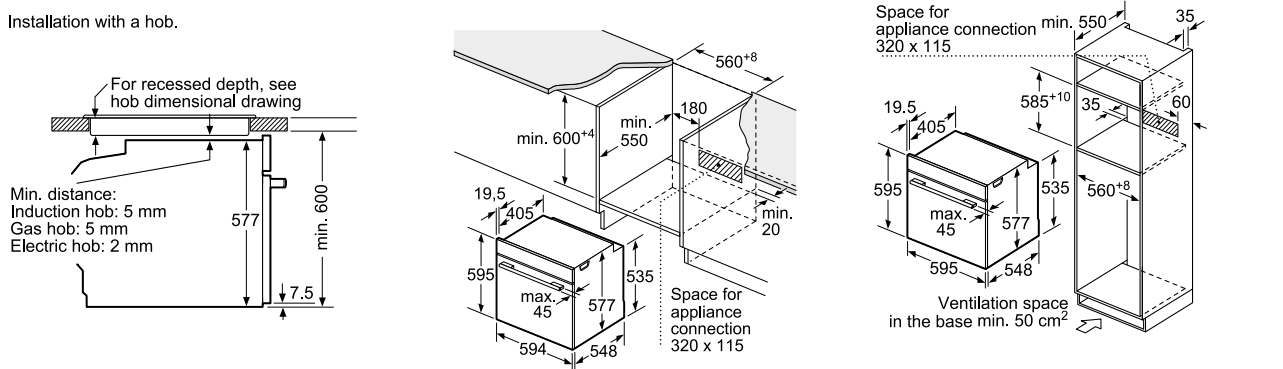


HM876G2B6A, HB875G8B1A, HB875GDB1A

Measurements in mm

iQ700 studioLine compact ovens with microwave

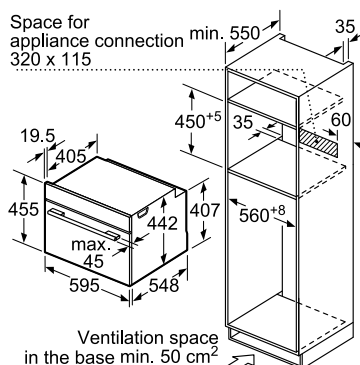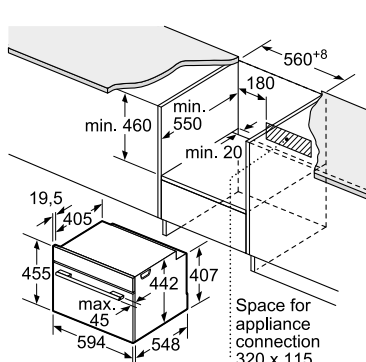

Installation with a hob.

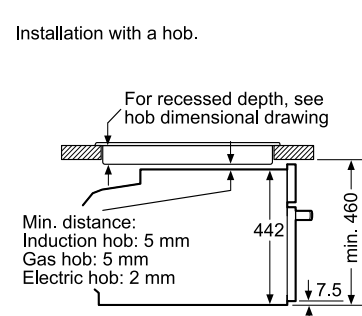

CM836GPB6A, CM833GBS1A

Measurements in mm

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

iQ700 studioLine fully automatic built-in coffee machine

min. 400
35
356
558
450⁺²
560⁺⁸
455
449
594
19

Bean and water containers are removed from the front. Recommended installation height 95-145 cm.

left corner installation

min. 350
110°

CT836LEB6 Measurements in mm

iQ700 studioLine 140mm warming drawer

min. 550
35
590⁺⁴
560⁺⁸
130
140
594
548

19
140
513
35
130
7,5

BI830CNB1A Measurements in mm

iQ700 studioLine vacuuming drawer







min. 550
35
590⁺⁵
560⁺⁸
130
140
594
542

19
140
507
35
130
7,5




BV830ENB1B Measurements in mm

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

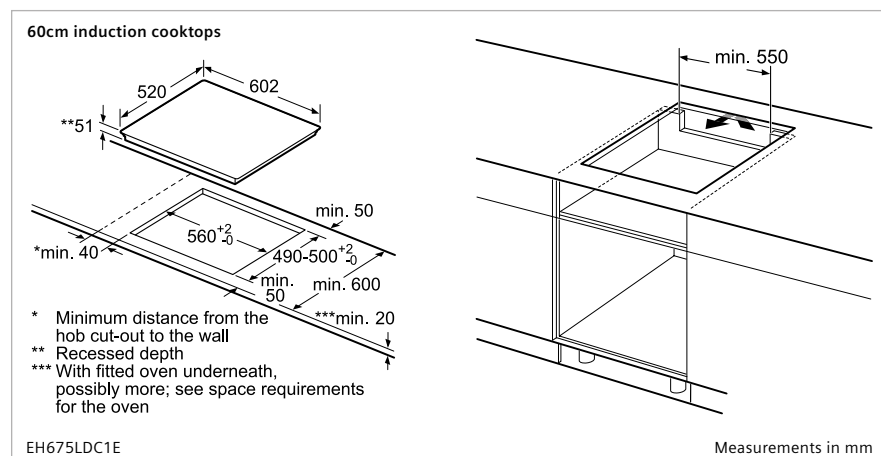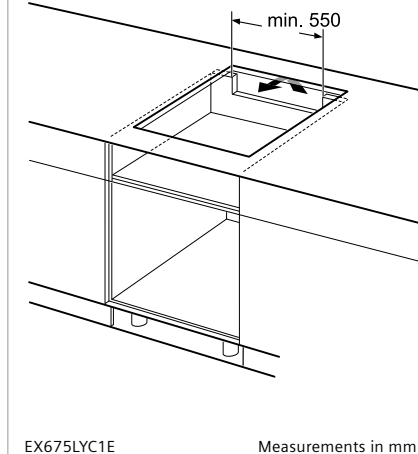
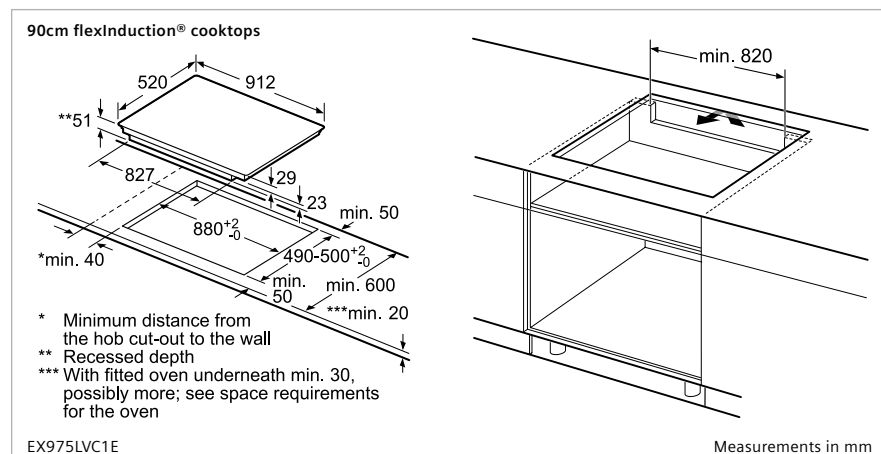
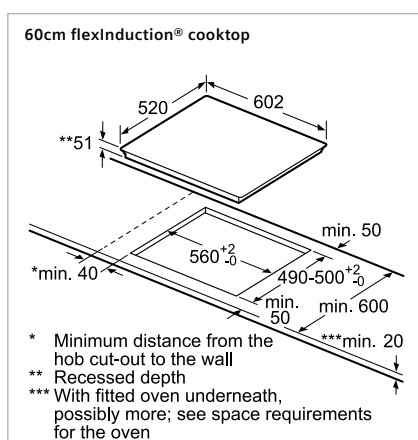
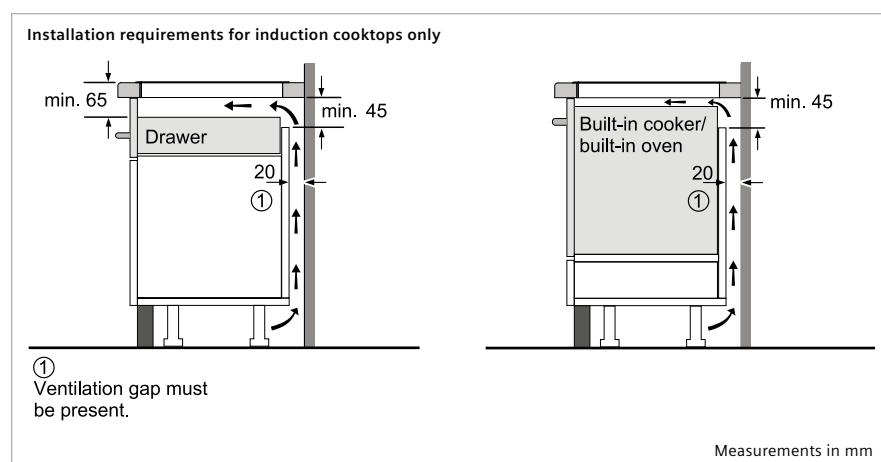
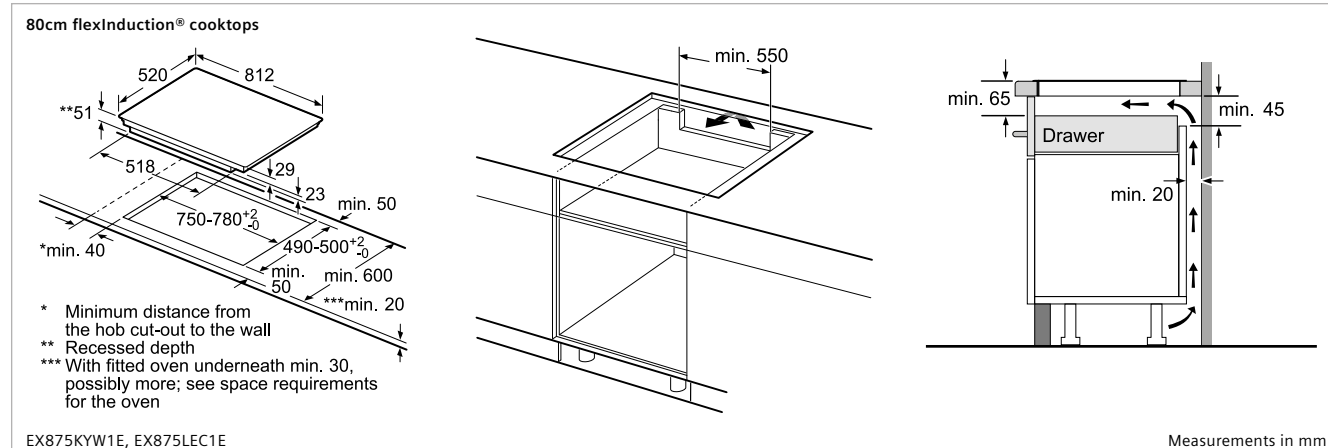


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

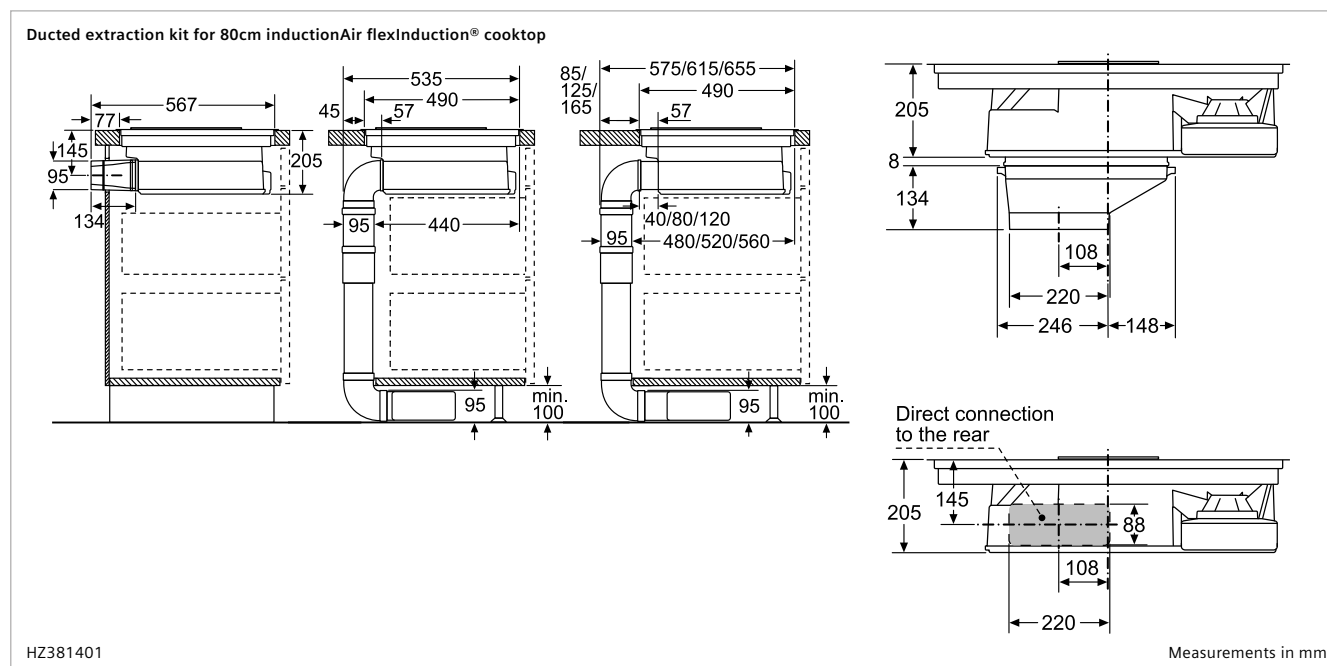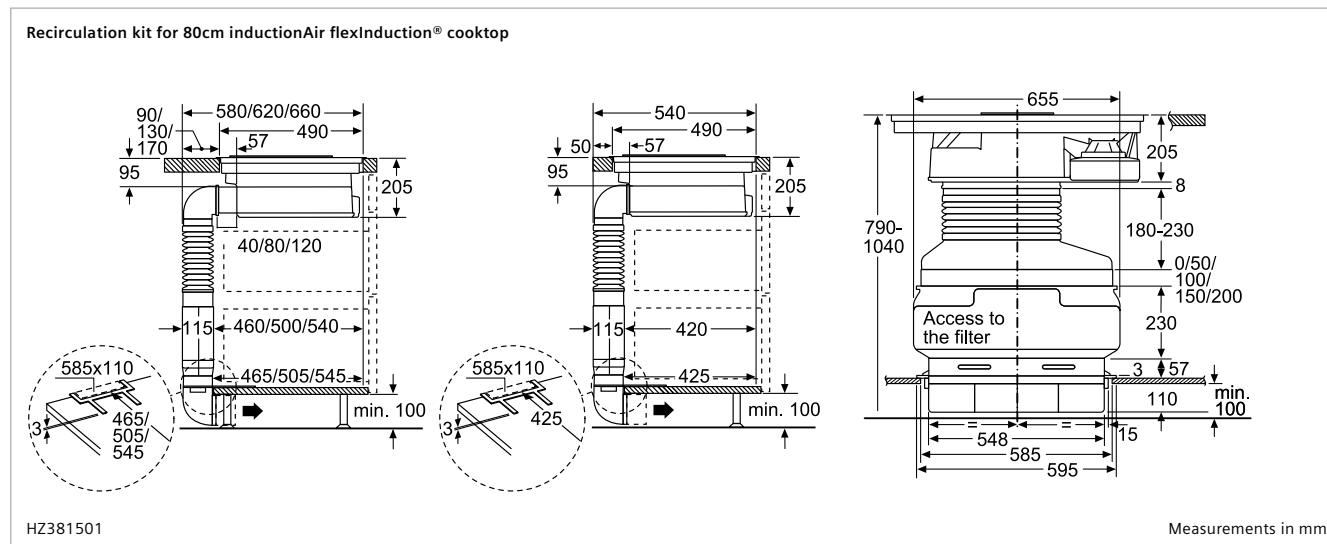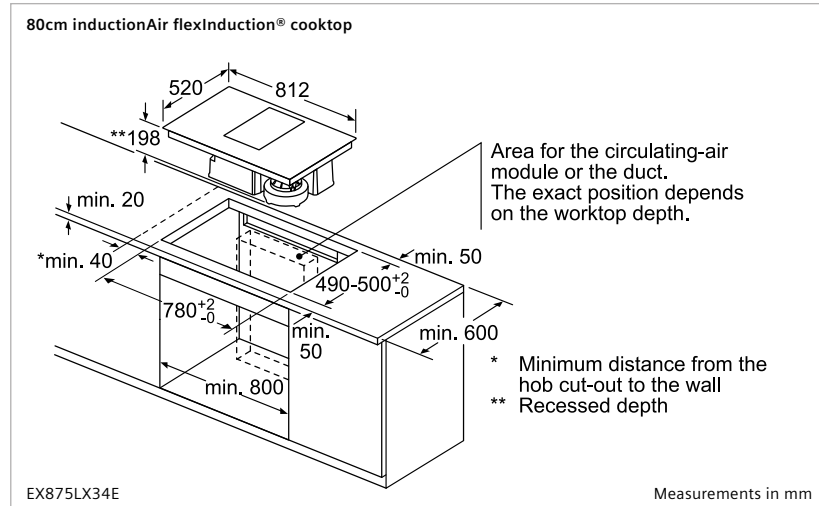

Technical diagrams


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

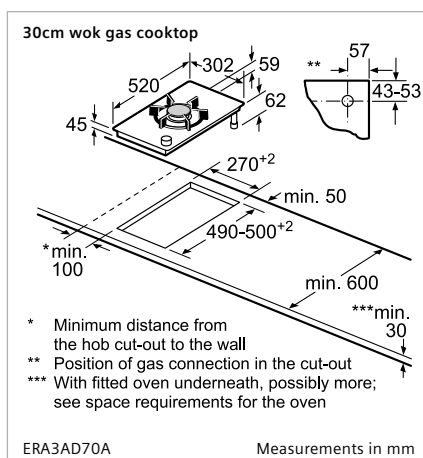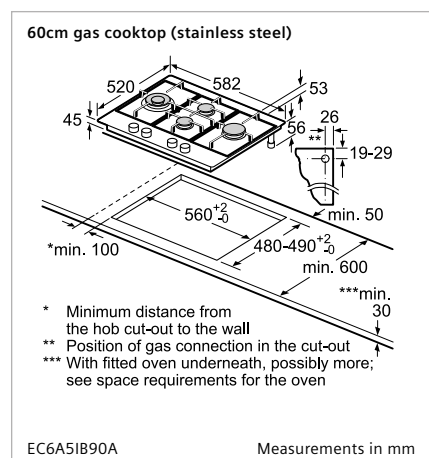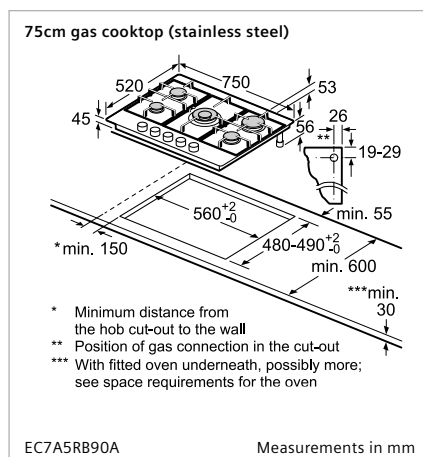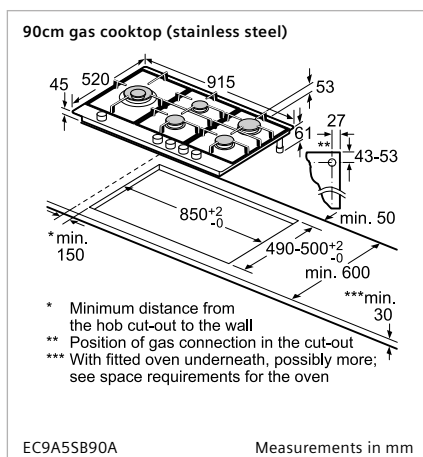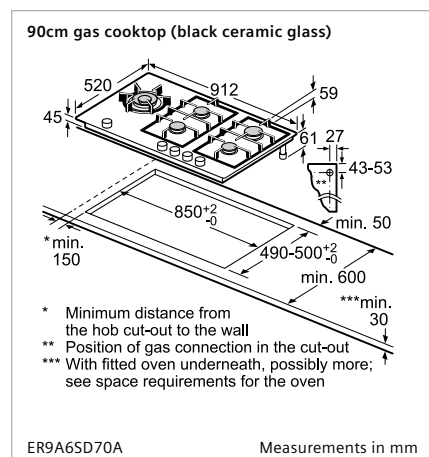

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.


Installation requirements for domino cooktops

Assembly kit (HZ394301)
for Domino

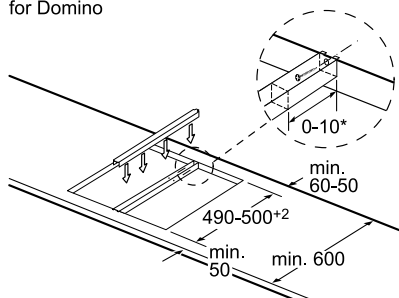

* Dependent on the cut-out depth

Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions

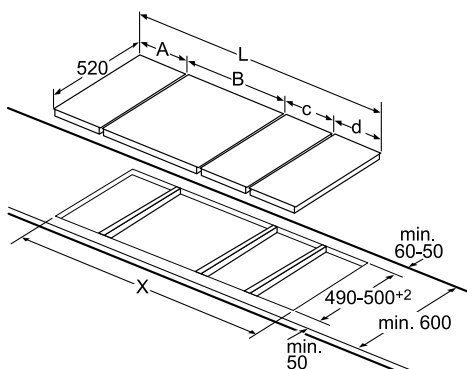

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.).

Cutout dimension (X) depending on the combination see table:





Domino combination possibilities with corresponding device and cutout dimensions

Width type: 30 40 60 70 80 90
Device width: 302 392 602 710 812 912

	A	B	C	D	L	X	
2x30	302	302	-	-	-	604	572
1x30, 1x40	302	392	-	-	-	694	662
1x30, 1x60	302	602	-	-	-	904	872
1x30, 1x70	302	710	-	-	-	1012	980
1x30, 1x80	302	812	-	-	-	1114	1082
1x30, 1x90	302	912	-	-	-	1214	1182
2x40	392	392	-	-	-	784	752
1x40, 1x60	392	602	-	-	-	994	962
1x40, 1x70	392	710	-	-	-	1102	1070
1x40, 1x80	392	812	-	-	-	1204	1172
1x40, 1x90	392	912	-	-	-	1304	1272
3x30	302	302	302	-	-	906	874
2x30, 1x40	302	302	392	-	-	996	964
2x30, 1x60	302	302	602	-	-	1206	1174
2x30, 1x70	302	302	710	-	-	1314	1282
2x30, 1x80	302	302	812	-	-	1416	1384
2x30, 1x90	302	302	912	-	-	1516	1484
1x30, 2x40	302	392	392	-	-	1086	1054
1x30, 1x40, 1x60	302	392	602	-	-	1296	1264
1x30, 1x40, 1x70	302	392	710	-	-	1404	1372
1x30, 1x40, 1x80	302	392	812	-	-	1506	1474
1x30, 1x40, 1x90	302	392	912	-	-	1606	1574
3x40	392	392	392	-	-	1176	1144
2x40, 1x60	392	392	602	-	-	1386	1354
4x30	302	302	302	302	-	1208	1176
3x30, 1x40	302	302	302	392	-	1298	1266
2x30, 2x40	302	302	392	392	-	1388	1356
1x30, 3x40	302	392	392	392	-	1478	1446

Measurements in mm

90cm wall-mounted canopy rangehood

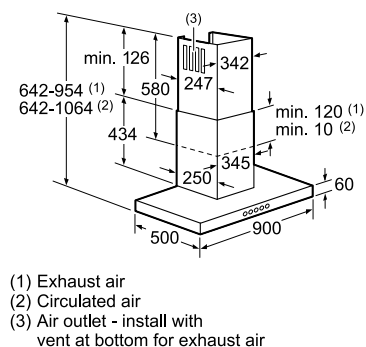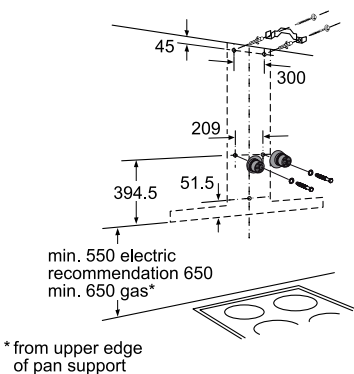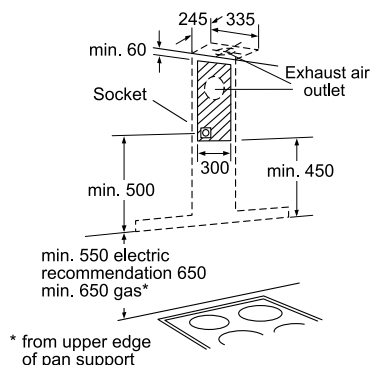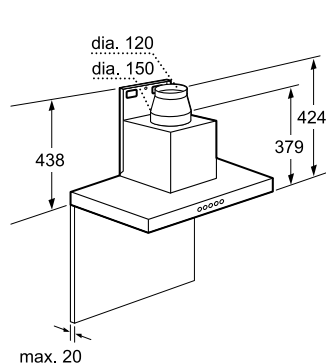





(1) Exhaust air
(2) Circulated air
(3) Air outlet - install with vent at bottom for exhaust air

LC918UV50A

Measurements in mm


Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

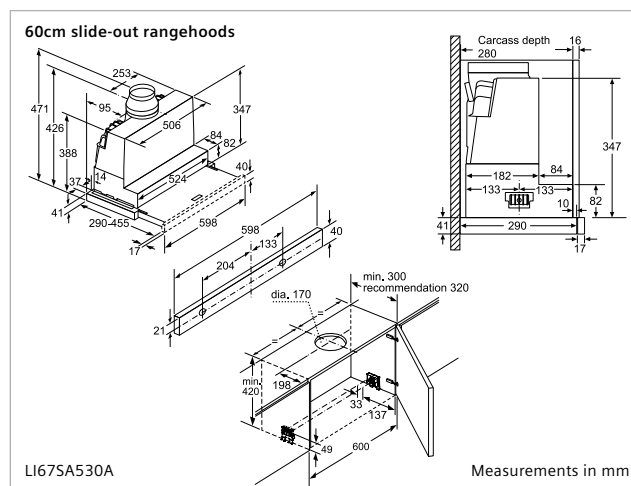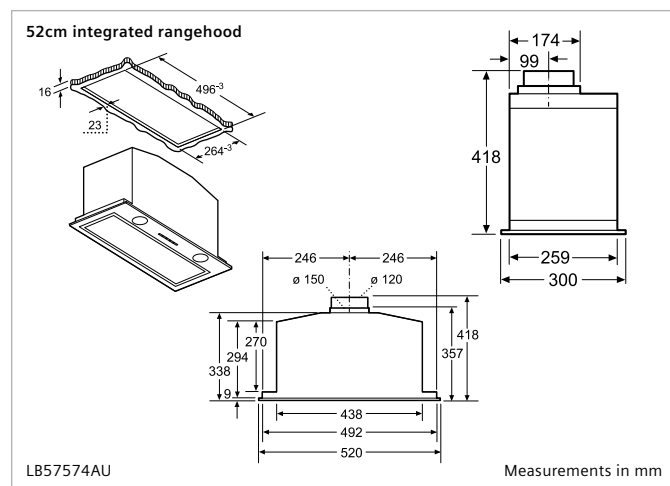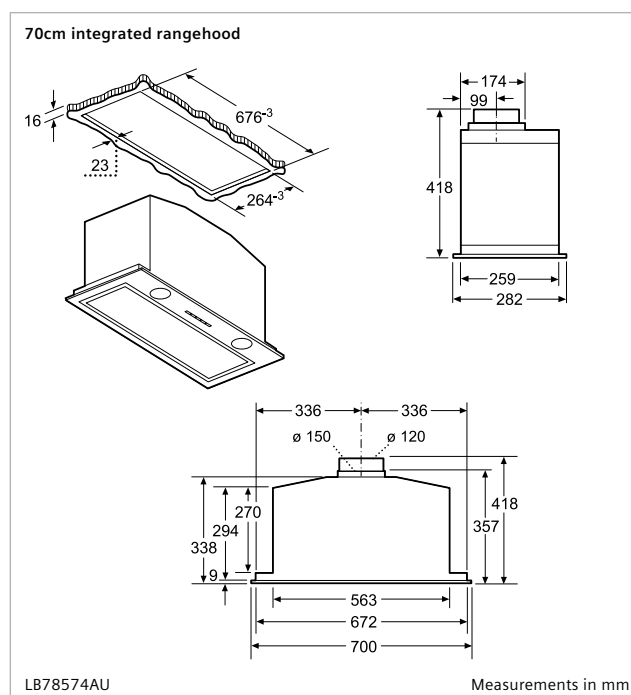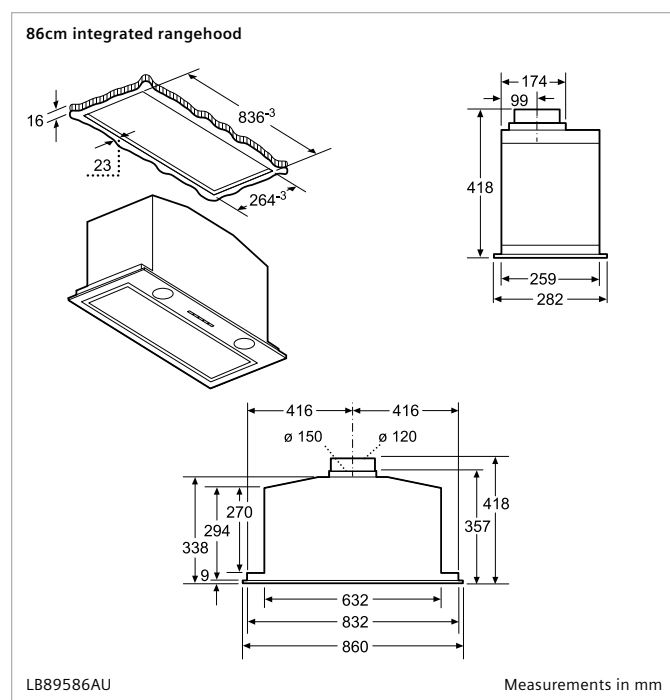

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

iQ700 studioLine fully integrated tallTub dishwasher

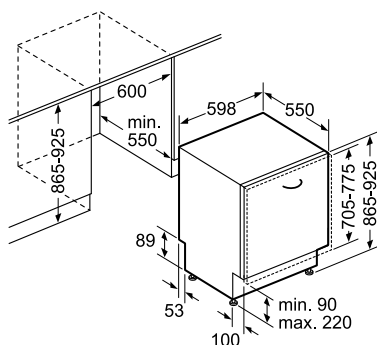


*Because of height-adjustable screw feet: when appliance height is 865, base height is 90-160mm; when appliance height is 925, base height is 150-220mm

SX678X11TA

Measurements in mm


iQ500 fully integrated dishwasher

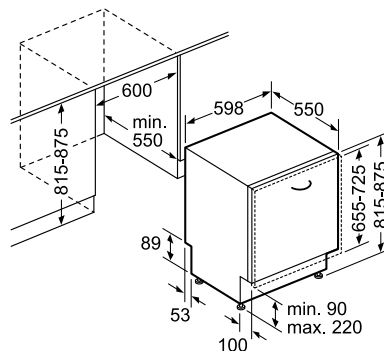

SN657X01MA

Measurements in mm

iQ700 studioLine semi-integrated tallTub dishwasher

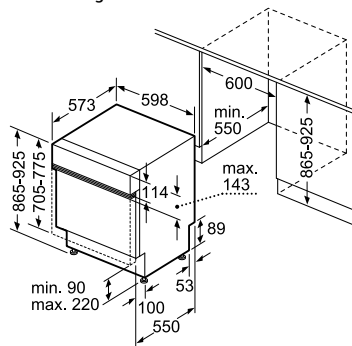


*Because of height-adjustable screw feet: when appliance height is 865, base height is 90-160mm; when appliance height is 925, base height is 150-220mm

SX578S01TA

Measurements in mm


iQ500 semi-integrated dishwasher

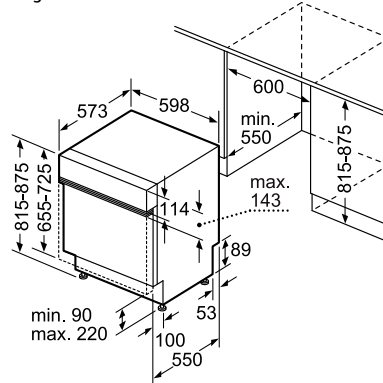

SN557S01MA

Measurements in mm

iQ700 studioLine & iQ500 built-under dishwashers

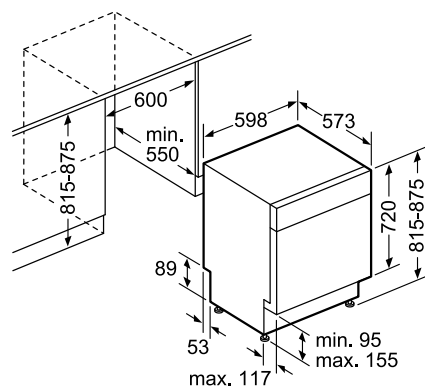


SN457S01MA, SN436S01JA

Measurements in mm

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Built-in fridge freezer

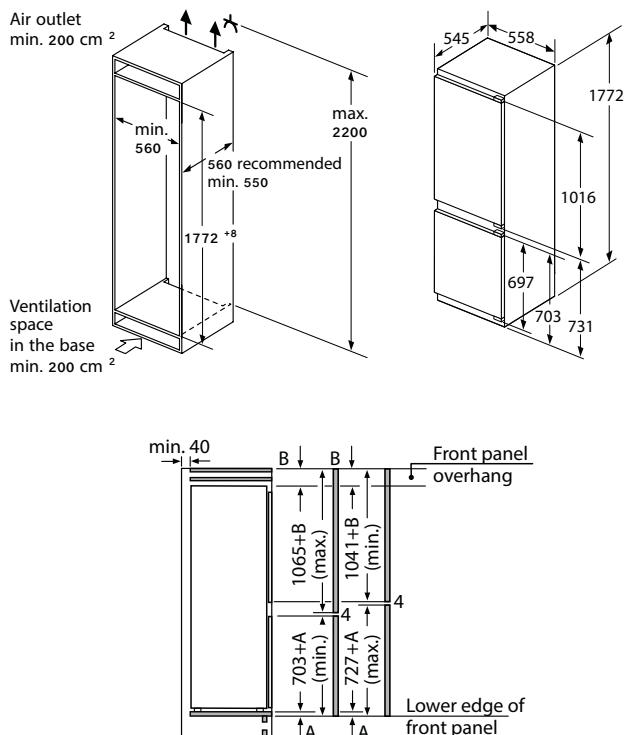


The specified unit door dimensions are valid for a door gap of 4 mm.

KI86NAD30A

Measurements in mm


Built-in single door fridge

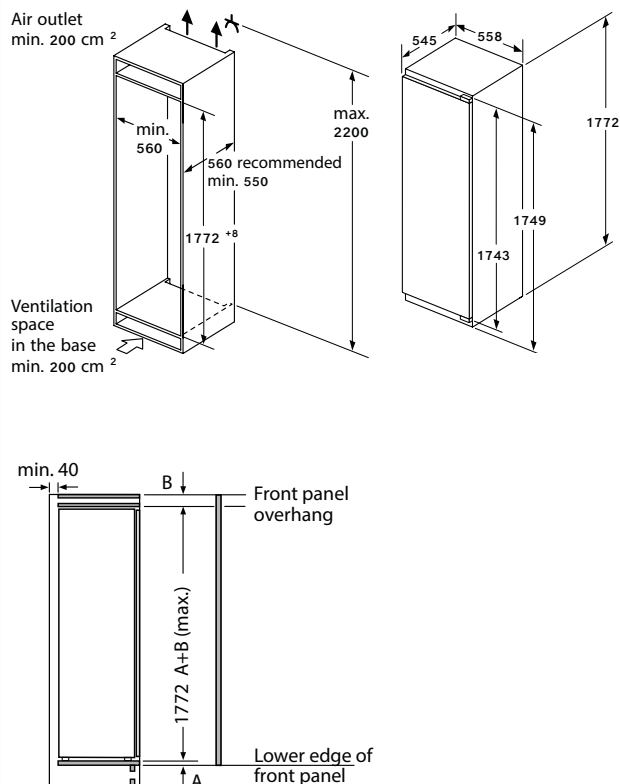

KI81RAD30A

Measurements in mm


Built-in single door freezer

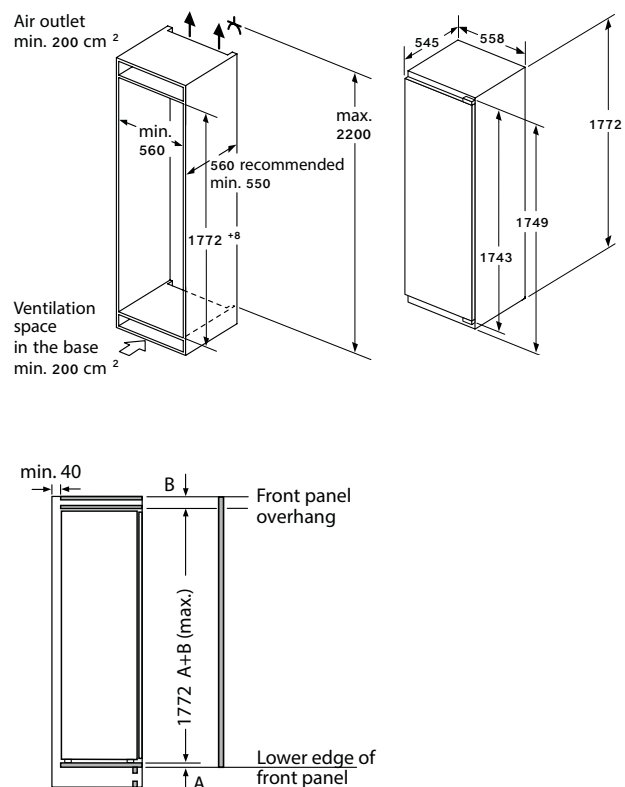

GI81NAC30A

Measurements in mm

Maximal permissible weight of the unit fronts



Fitted kitchen unit doors that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

T: Includes height of appliance door Hinges in mm:	undamped hinge, Door in kg:	damped hinge, Door in kg:
1500-1750	22	22

measurements in mm Recommended gap dimensions for flat hinges

F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

Notes



Siemens home appliances catalogue is printed in an environmentally conscious way, using inks containing linseed oils and stock manufactured to high environmental standards.



Please recycle this catalogue.

Our services

Siemens Customer Care

1300 167 425

24 hour phone support

7:00am Monday to midnight Friday AEST

For product information and user guidance, technical assistance, repair queries and servicing appointments, warranty information and dealer locations.

siemens-home.bsh-group.com.au

Product information and user guidance, downloadable brochures and user manuals, technical data and warranty information.

BSH Home Appliances Pty Ltd

BSH Group is a Trademark
Licensee of Siemens AG

1555 Centre Road
Clayton VIC 3168

Phone: 03 8551 1100
Fax: 03 8551 1182

siemens-home.bsh-group.com.au

Important Notes:

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without prior notice. Please contact your local Siemens retailer for the latest information.

Siemens is continuously seeking to improve specification, design and production to its appliances and alterations may take place regularly.

All descriptions and installation diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction manual supplied with the appliance.

The electrical and gas connection should only be made in accordance with the regulations of the national authorities.

Right of technical modification reserved, delivery subject to availability. Due to variation in photographic and printing processes, colours of actual products may vary slightly from illustrations. ®Registered trademark.

©2020 by BSH Home Appliances Pty Ltd. Reproduction, complete or in part, only with the express permission of the publisher.

BSH Home Appliances Pty. Ltd. ABN 22 109 198 405

While every care has been taken in the preparation of this publication, BSH Home Appliances Pty Ltd does not warrant the accuracy or completeness of the information in this publication and BSH Home Appliances Pty Ltd reserves the right to alter specifications without notice. To the extent permitted by law, BSH Home Appliances Pty Ltd excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.